



PMDC
PAKISTAN MINERAL DEVELOPMENT CORP.

Head Office

Plot No: 13, Sector H/9, Islamabad 44000,
Pakistan.
Tel: 9265123-24
E-mail: info@pmdc.gov.pk
www.pmdc.gov.pk

Invitation of E-BID

Pakistan Mineral Development Corporation is an autonomous corporation under the administrative control of Ministry of Energy (Petroleum Division), Government of Pakistan invites electronic bids (Lot – Wise) from the interested parties/contractors having valid registration with Pakistan Engineering Council (PEC) in C – 6 Category or above, Federal Board of Revenue (FBR)/Respective Revenue Boards for income tax & sales tax and who are on active taxpayer list (Income & Sales Tax) of the Federal Board of Revenue (FBR)/Respective Revenue Boards for following Works at PMDC Salt Mines, Khewra:-

Lot No.	Detail of Works	Bid Security
LOT NO. 01	Renovation and RCC Roof Slab for Main Store Workshop at PMDC Salt Mines, Khewra.	Rs.100,000/-
LOT NO. 02	Construction of 02 Nos. Bungalows and Boundary Wall at Officer Colony, PMDC Salt Mines, Khewra.	Rs.500,000/-

E-Bidding documents containing detailed terms and conditions, method of procurement, bid security, opening of bid, etc. are available electronically and can be downloaded from EPADS-PPRA Website: <https://eprocure.gov.pk> free of cost.

The electronic bids, prepared in accordance with the instructions in the bidding document along with bid money as stated above in the shape of demand draft/pay order in the name of Pakistan Mineral Development Corporation on account of bidder must be submitted by using EPADs on or before **20.07.2026 at 11:00 AM**. Tenders will be opened on EPADs on the same date at **11:30 AM** in the presence of participants who may desire to attend the tender opening.

Note:-

1. Original Bid Security Instrument Must be submitted to undersigned, before the online submission deadline of the bid; otherwise, respective bid will not be opened.
2. In case of any technical difficulty in using EPADS, prospective bidders may contact PPRA Office, 1st Floor, FBC building Sector G-5/2, Islamabad. Contact Number 051-111-137-237.

AVP (Procurement)
PMDC Head Office, H-9/4, Islamabad
Phone: 051-9265128
E-mail: dgm-pro@pmdc.gov.pk





PMDC
PAKISTAN MINERAL DEVELOPMENT CORP.

Head Office

Plot No: 13, Sector H/9, Islamabad 44000,
Pakistan.
Tel: 9265123-24
E-mail: info@pmdc.gov.pk
www.pmdc.gov.pk

**Tender Enquiry No. Ref: No. PMDC/Pro/Shed-Bungalow/KHW/
DUE FOR OPENING ON: 20.07.2026 AT 11:30 AM**

Electronic bids (Lot – Wise) are invited from the interested parties/having valid registration with Pakistan Engineering Council (PEC) in C – 6 Category or above, Federal Board of Revenue (FBR)/Respective Revenue Boards for income tax & sales tax and who are on active taxpayer list (Income & Sales Tax) of the Federal Board of Revenue (FBR)/Respective Revenue Boards for following Works at PMDC Salt Mines, Khewra as per BOQ/Technical Specs given below :-

SUMMARY OF COST


Lot No.	Detail of Works	Total Cost in PKR (inclusive of all taxes)
<u>LOT NO. 01</u>	Renovation and RCC Roof Slab for Main Store Workshop at PMDC Salt Mines, Khewra Specifications/Bill of Quantities as per Annex - A	
<u>LOT NO. 02</u>	Construction of 02 Nos. Bungalows and Boundary Wall at Officer Colony, PMDC Salt Mines, Khewra. Specifications/Bill of Quantities as per Annex - B	

GENERAL TERMS AND CONDITION:

- Electronic Bid must be submitted on EPAD on or before **20.07.2026 at 11:00 AM** which will be opened on the same day at **11:30 AM** in the presence of tenderers or their representatives who desire to participate.
- Bid Money as per following detail in the form of pay order/demand draft made in the name of Pakistan Mineral Development Corporation on account of bidder from any scheduled bank shall accompany the bid/tender. Tender with less or without bid money (in the form of pay order/demand draft) or pay order/demand draft shall not be considered:-

Lot No.	Detail of Works	Bid Security
LOT NO. 01	Renovation and RCC Roof Slab for Main Store Workshop at PMDC Salt Mines, Khewra.	Rs.100,000/-
LOT NO. 02	Construction of 02 Nos. Bungalows and Boundary Wall at Officer Colony, PMDC Salt Mines, Khewra.	Rs.500,000/-

- Successful tender will be required to deposit security money @ 10% of the total value and bid money already deposited will be converted into security deposit while balance amount shall



have to be deposited to maintain the Security deposit @ 10% of the total value which will be refunded after successful completion the DLP.

4. The successful bidder shall be required to furnish Integrity Pact if applicable, as per PPRA Rules.
5. Bidders can bid in any of the above 02 Lots.
6. Tenders will be evaluated and awarded on a lot-wise basis. Bidders meeting the required all mandatory required documents and relevant experience, will be considered Technical responsive among the technical responsive bidders the contract will be awarded to the bidder offering the lowest evaluated price.
7. The rates should be quoted in PKR and should be inclusive of all applicable/prevaling taxes. Any increase in taxes at any stage shall not be considered.
8. The rates, prices and amounts shall be entered against each item in the Schedule of Prices/BOQ. Any item against which no rate or price is entered by the bidder will not be paid for by the Employer when executed and shall be deemed covered by the rates and prices for other items in the Schedule of Prices.
9. Interpretation of the PMDC regarding the tendered rates in case of any discrepancy regarding unit rates and total amount shall be final.
10. Escalation of cost at any circumstances will not be permitted.
11. **Bidders are requested to visit the sites before quoting rates.**
12. The bidder will be responsible to carry out the works as per detailed mentioned in BOQ and the payment to the contractor shall be made on actual work done.
13. All the materials, equipment's, workmanship, and installation practices used in civil works, electric works, plumbing works etc. strictly conforming to relevant standards, latest editions, as applicable and the respective material etc. shall be unused, of highest quality.
14. No running/interim payment will be applicable.
15. The Project Manager/Engineer may request samples of material to be installed in order to check its quality for approval purpose.
16. The quantity can be increased (upto 15% of the total contracted quantities) or decreased during the period of the contract at the sole discretion of PMDC without any prior notice to contractor.
17. No extra item shall be allowed to be executed without written orders from the concern Project Manager.
18. Concern Project Manager shall reserve the right to add/ delete any item from bill of quantities and the contractor will be responsible to execute any extra item required at site to complete the work and the payment for the same shall be made on mutually agreed rates.
19. The Water Charges shall be deducted at the rate of 1% of the contract price. Electricity charges shall be deducted as per the prevailing per-unit rate against the actual consumed units from every bill submitted by the contractor, in accordance with applicable rules. The contractor shall install a sub-meter at his own cost for the purpose of recording electricity consumption at the site.



20. However, if PMDC resources (water and/or electricity etc.) are not used during execution of the work and the contractor arranges all such utilities at his own cost, then no deduction on account of water or electricity charges shall be made from the contractor's bills.
21. No extra payment for water and electricity works etc. shall be claimed by the contractor.
22. The Contractor shall be responsible to make complete arrangements for the transportation/storage/security of the material etc. and the security/stay of his staff/workers.
23. Any damages to PMDC assets, HR of whatsoever nature shall be completely borne by the contractor.
24. The contractor shall execute works in a manner that daily operations/works of PMDC may not be affected.
25. Bids should remain valid for a period of 90 days from the date of opening of tenders. In case no specific date of validity is mentioned in the offer, it will be presumed to be valid for a period of 90 days from the date of opening of tender.
26. If the contractor fails to fulfill the contractual obligations of the contract, then the Security deposit will be forfeited.
27. All taxes will be applicable/deducted as per prevailing Government rules.
28. Firm/Contractor should be of sound financial health and shall provide Bank statement covering last 12 months (from the date of submission of bid).
29. Firm/Contractor must provide a list of the construction machinery and equipment available with the tenderer.
30. The Firm/Contractor should have 03 years' experience in relevant Project/ work with Govt. departments and other organizations/companies. Proof of relevant experience/work order as well as satisfactory completion certificates should be attached.
31. The tender for the supply / work will be completed / delivered at PMDC Salt Mines, Khewra.
32. The completion period for Lot No. 01 shall be two (02) months, whereas the completion period for Lot No. 02 shall be six (06) months. In case of delay, LD Charges @ rate 0.10% of total contract value will be applied per day upto 10 % of Total Contract Value.
33. Defect liability period (DLP)/warranty is 12 months, which will be start from the issuance of completion certificate.
34. If the Supplier/Contractor, having been notified, fails to remedy the defect(s) within the specified period, PMDC may proceed to take such remedial action as may be necessary, at the Supplier's risk and expense.
35. The successful tender will have to execute a contract within the specified time, Payment will be made after satisfactorily completion work as per specifications and on submission of the bill in duplicate along with satisfactory completion certificate/report whereas security deposit will be refunded after expiry of DLP/warranty period.
36. The authorized representative of the bidder/bidding firm will only be allowed to sit in the tender opening on presentation of authority letter from the bidder/bidding firm issued in favor of representative to participate in the specific tender.



37. Firm/Contractor or any its subsidiary firms or of its directors/owners or any their relatives' parents, children, brother, sister) should not be under litigation with PMDC in any local or foreign court law.
38. Firm/Contractor or any its subsidiary firms or of its directors/owners or any their relatives' parents, children, brother, sister) should not have any ongoing, under resolved business dispute with PMDC, PMDC shall be sole judge of fulfillment of this requirement.
39. Firm/Contractor or any its subsidiary firms or of its directors/owners or any their relatives' parents, children, brother, sister) should not have any direct or indirect conflict of interest with the procuring agency.
40. In case of any dispute regarding this purchase order/assignment, the same will be resolved between the relevant parties through negotiations. If negotiations shall fail, then matter will be referred to the Arbitrator. The MD, PMDC will act as sole Arbitrator as per Arbitration Act, 1940. Decision/award of Arbitrator will be final and binding on the both parties.
41. The tenderer/supplier shall appoint a representative at the project and furnish his postal address and contact number to PMDC. Any notice to be served on or document to be signed by the contractor shall be either delivered personally or through the representative and in case it is not possible it shall be treated to have delivered if it has been mailed by registered post on the Postal Address of the representative.
42. PMDC Reserved the right to accept or reject the tender of the tenderer at any time without assigning reasons and cannot be challenged in any court of law.
43. The tenderer/supplier will be blacklisted who is found to the tender process by making coercive practices, collusive practices, corrupt practices, fraudulent practices & obstructive practices.
44. I agree to the above terms and conditions and give my acceptance.
45. Checklist of documents to be attached.

Note: For any technical queries, please contact Project Manager, PMDC Salt Mines, Khewra, Ph. No. 0544-231137.

Signature of tenderer: _____

Name of tenderer: _____



A handwritten signature in blue ink, appearing to be 'Sajid Hussain', with a long horizontal stroke extending to the right.

(Sajid Hussain)

AVP (Procurement)

PMDC Head Office, H-9/4, Islamabad

Phone: 051-9265128

E-mail: dgm-pro@pmdc.gov.pk

MATERIAL SPECIFICATIONS/BRANDS TO BE USED

Sr. No.	Item	Brand/Make
1	Bricks	1 st class brick or approved Eqv.
2	Sand	Ravi & Chenab or approved Eqv.
3	Cement	Bestway, Maple or approved Eqv.
4	Tiles	Times/Master or approved Eqv. 12"x24", 24"x24" etc.
5	Paint/Weather shield	Berger or approved Eqv.
6	Aluminum	Alco or approved Eqv. 2.0mm or 1.6mm as per site
7	Glass	Ghani or approved Eqv.
8	Lamination Sheet	ZRK/Patex or approved Eqv.
9	Wood	Kail or approved Eqv.
10	Conduits	Adam Jee or approved Eqv.
11	Wires	Pakistan/Fast Cables
12	Electric Switches/Sockets etc.	TJ or approved Eqv.
13	Breakers	Chint or approved Eqv.
14	Lights	Osaka or approved Eqv.
15	Fans	GFC or approved Eqv.
16	Sanitary Pipes	Minhas, Popular or approved Eqv.
17	Sanitary Fixtures	Faisal or approved Eqv.
18	Commode (Indian & English), Basin	Three Star or approved eqv.
19	False Ceiling	Arish with Aluminum T, channel etc. of CMK or approved eqv.



Check List

Sr. No.	Description	Yes	No												
1	Original Bid money as per following detail is attached/handed over to the PMDC :- <table border="1" style="margin: 10px auto; width: 80%;"> <thead> <tr> <th>Lot No.</th><th>Bid Security</th><th>No.</th><th>Dated</th></tr> </thead> <tbody> <tr> <td>1.</td><td>Rs.100,000/-</td><td></td><td></td></tr> <tr> <td>2.</td><td>Rs.500,000/-</td><td></td><td></td></tr> </tbody> </table>	Lot No.	Bid Security	No.	Dated	1.	Rs.100,000/-			2.	Rs.500,000/-				
Lot No.	Bid Security	No.	Dated												
1.	Rs.100,000/-														
2.	Rs.500,000/-														
2	Copy of CNIC and Authority Letter.														
3	Copy of valid PEC Certificate.														
4	Copy of registration certificate with FBR/relevant authority department.														
5	Copies of experience certificate, work orders as well as completion/performance certificate not less than 03 years.														
6	List of the construction machinery and equipment available with the tenderer.														
7	List of technical staff available with the tenderer who will execute/ supervise the work.														
8	Financial Soundness Proof (Bank Reference or Bank Statement, Audited Report / Accounts).														
9	Affidavit of No litigation with PMDC.														
10	Affidavit regarding No dispute with PMDC.														
11	Affidavit regarding No conflict of interest with PMDC.														



Tenderer/Bidder Signature

LOT - 1 Only
Specifications/Bill of Quantities

Renovation and RCC Roof Slab for Main Store Workshop at PMDC Salt Mines, Khewra.

Sr. No	Discription	Quantity	Unit Rate in PKR inclusive of all taxes	Per	Total in PKR inclusive of all taxes
1	Dismantling of Main Store workshop Mud-roof, Tiles Wooden Rafters. Complete in all respect including disposal of surplus stuff at proposed place.	1540 sqft		100	
2	Dismantling of Brick Masonry Parapet of Main Store workshop cement sand mortar. Complete in all respect including disposal of surplus stuff at proposed place.	140 cft		100	
3	Providing and laying of reinforced cement concrete 1:2:4 using wash crushed graded in require shape(Margala) and design in roof slab and other structure member laid in position. Complete in all respect or as directed by Engineer/In-Charge.	1236 sft		Per cft	
4	Providing and Fabrication of mild steel reinforcement for cement concrete including cutting bending laying in position making joint and fastening including cost of binding wire with concealed beam and Hinged beam under the roof with labor charges D/formed bars. Steel - 60 Grade. Complete in all respect or as directed by Engineer/In-Charge.	2790 kgs		100	
5	Providing/Laying Bricks masonry work 1.4 cement sand mortar for parapet of Main Store Workshop. Complete in all respect or as directed by Engineer/In-Charge.	130 cft		100	
6	Providing/Applying Cement plaster with 1.4 cement sand mortar inner and outer side its shades, parapet etc., complete in all respect including damaging portion of (wall thick 1÷2 inch). Complete in all respect or as directed by Engineer/In-Charge.	4668 sqft		100	
7	Providing /Applying white washing/ Distempering (Berger, Nippon,Brighto) with 3 coats on new surface inner side and old surface 2 coat including well scrubbing, sand papering. Complete in all respect or as directed by Engineer/In-Charge.	5000 sqft		100	
8	Removal of old wiring, points and Providing/Laying of new concealed electric wiring of light, fan, plugs points from point to switch with 7/0.29 AND 3/0.29 Pakistan /Fast/ Newage cable with all accessories such as PVC concealed conduit PPI switches, fixed on plastic sheet in plastic box, ceiling rose and holder, fan box, half switch gang sheet, plugs etc. Complete in all respect. Electrical Works shall comply with IEC Standards i.e. IEC 60228 for Conductors ,IEC 60227/60502-insulated cables, IEC 60364 for electrical installations. Complete in all respect or as directed by Engineer/In-Charge.	50 Points		Per Point	



9	Supplying and installation of powder coated main switch board for Main Store workshop. with main circuit breaker 100 AMP and sub-breaker of appropriate size/number., Complete in all respect or as directed by Engineer/In-Charge.	1 No		Each	
10	Providing and fitting of energy saver Philips or equivalent in inner and outer side of Main Store workshop. Complete in all respect or as directed by Engineer/In-Charge.	10 Nos		Each	
11	Providing and fitting of parnalas PVC Pipe 4"Φ in vertical position for drainage of rainy water from roof including clamps PVC bend and PVC Elbow etc. Complete in all respect or as directed by Engineer/In-Charge.	65 Rft		Per Rft	
G. Total in PKR inclusive of all taxes (Lot – 01 Only) Renovation and RCC Roof Slab for Main Store Workshop at PMDC Salt Mines, Khewra.					



LOT - 02 Only
Specifications/Bill of Quantities


Construction of 02 Nos. Bungalows and Boundary Wall for Officers Colony at PMDC Salt Mines, Khewra.					
Sr. No	Discription	Quantity	Unit Rate in PKR inclusive of all taxes	Per	Total in PKR inclusive of all taxes
1	Excavation in foundation of room and other structure including dag-belling, dressing, refilling around structure with excavated earth watering and ramming lead up to one chain lift upto 3ft. Complete in all respect including disposal of surplus stuff at proposed places.	6039 cft		1000 cft	
2	Providing/Laying P.C.C 1:2:4 Lien concrete in foundation of bungalows. Complete in all respect or as directed by Engineer/In-Charge.	910 cft		100 cft	
3	Providing/Laying Course Rubble masonry hammer dressed in foundation Ratio 1:4. Complete in all respect or as directed by Engineer/In-Charge.	3642 cft		100 cft	
4	Providing/Laying Course Rubble masonry hammer dressed in foundation and plinth. Ratio 1:4. Complete in all respect or as directed by Engineer/In-Charge.	2408 cft		100 cft	
5	Providing/Laying D.P.C thick 3" with cement concrete 1:2:4 etc. complete Including bitumen coating. Complete in all respect or as directed by Engineer/In-Charge.	1214 sqft		100 sqft	
6	Providing/Laying Pacca Bricks masonry work with 1:4 cement sand mortar in super-structure. Complete in all respect or as directed by Engineer/In-Charge.	5697 cft		100 cft	
7	Providing/Laying Single layer of tiles 9"x4 1/2 "x4 1/2 " laid over 4" earth and 1" mud plaster without bhoosa grouted with cement sand 1:3 on top of RCC roof slab provided with 34lbs bitumen coating sand blinded i/c polythene sheet 500 gauage. Complete in all respect or as directed by Engineer/In-Charge.	3344 sqft		Per sqft	
8	Providing and laying of reinforced cement concrete using ordinary Portland cement coarse sand and screened graded and washed aggregates, best quality margalla and others as directed by engineer in require shape and design, including forms, moulds, shuttering, lifting, compacting, curing, rendering and finishing. Complete in all respect or as directed by Engineer/In-Charge.	1826 cft		Per cft	
9	Providing/Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire and labor charges for binding of steel reinforcement deformed bars ,door beam window beam and roof slab etc., complete in all respect.(Steel 60 Grade)	5000 Kgs		100 kgs	
10	Providing/Laying Bricks masonry work 1.4 cement sand mortar for parapet. Complete in all respect or as directed by Engineer/In-Charge.	342 cft		100 cft	
11	Providing/Laying Cement plaster with 1:4 cement sand mortar inner and outer side Bungalows room thick 1/2 inch etc. Complete in all respect or as directed by Engineer/In-Charge.	19200 sqft		100 sqft	
12	Earth filling in bungalow room for flooring work with levelling dressing and compaction etc. Complete in all respect or as directed by Engineer/In-Charge.	3740 sft		100 sqft	
13	Providing/Laying P.C.C 1:2:4 under flooring hard coat (6 inch). Complete in all respect or as directed by Engineer/In-Charge.	942 cft		100 cft	
14	Providing and fixing of marble tile mala gori size 12"x12"x1/2" or required as per site requirement including with chemical polish etc., Complete in all respect or as directed by Engineer/In-Charge.	1768 sqft		Per sqft	
15	Providing and fixing of kitchen cabinet and almirah if required as per site requirement installed in best quality. Complete in all respect or as directed by Engineer/In-Charge.	900 sqft		Per sqft	
16	Providing and laying superb quality of ceramic/glazed tiles in washrooms etc., Complete in all respect or as directed by Engineer/In-Charge.	876 sqft		per sqft	
17	Providing and fixing of first class deodar wood wrought joinery in doors and window etc., paneled or glazed or fully glazed fixed in position including chowkhat hold fast hinges tower bolt checks rubber stops cleats/clamps handle and chord with hooks etc., and the suitable for doors and windows Aluminum as per site requirement with painting 3 coats Complete in all respect or as directed by Engineer/In-Charge.				
a	Wooden Doors	483 Sqft		Per sqft	
b	Aluminum Windows	288 Sqft		per sqft	



18	Providing and laying reinforced cement concrete 1:2:4 for waist slab 6" thick, steps landing, including framework, centering, shuttering, laying, compacting, finishing and curing steel excluded. Granite marble on tread ¾ inch thick bullnose, tile on tread/riser non skid, MS railing 40mm dia pipe 3' high with bluster Complete in all respect or as directed by Engineer/In-Charge. Thumb rule: $2 \times \text{Riser} + \text{Tread} = 24"$ to 25" Best comfort: Riser 6" Tread 12" $2 \times 6" + 12" = 24"$ perfect Stair 4ft wide, 12ft height, Riser 6", Tread 12" Riser 24 Nos, Tread 23 Nos	2Nos		Per No	
19	Providing and fixing in position white glazed English commode (three star or approved eqv.) with flush tank of appropriate ceramics including all parts of installation e.t.c. Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
20	Providing and fixing in position white glazed W.C full size of appropriate ceramics and three gallons capacity flush tank(Master) with all parts for installation etc. Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
21	Providing and fixing wash hand basin with pedestal single hole including basin bolt waste pipe and waste coupling etc., Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
22	Providing and fixing Chromium plated tower rail long 24". Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
23	Providing and fixing of steel bibcock ½ " dia including necessary fitting (preferred Asia). Complete in all respect or as directed by Engineer/In-Charge.	08 Nos		Per No	
24	Providing and fitting double head bibcock and toilet shower with pipe etc., Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
25	Providing and fitting of looking glass thickness 5mm with bracket shelf 24"×30"etc. Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
26	Providing and fitting of plastic soap dish. Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
27	Providing and fixing of plastic toilet paper Holders with Tissue Roll. Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
28	Providing and fixing of chromium plated T.Stop cock Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
29	Providing and fixing of side pillar cock for wash hand basin etc. Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
30	Providing and fixing of floor, traps including all parts for installation etc. Complete in all respect including disposal of surplus stuff at proposed places.	04 Nos		Per No	
31	Providing and fixing of steel jally size 6"×6" etc. Complete in all respect or as directed by Engineer/In-Charge.	04 Nos		Per No	
32	Providing and laying cutting jointing PVC pipe 3" dia etc. Complete in all respect or as directed by Engineer/In-Charge.	130 rft		Per rft	
33	Providing and laying cutting, jointing PVC pipe 4" dia PVC Elbow 4", PVC bend 4" and all other sanitary item use of washrooms kitchens and others etc. Complete in all respect or as directed by Engineer/In-Charge.	208 rft		Pe rft	
34	Providing and fitting PPR pipe 25mm dia and 32mm dia line with necessary fitting including PPR pipe PPR elbow, hook, and all fitting of Kitchen bathroom and other. Complete in all respect or as directed by Engineer/In-Charge.	600 rft		Per rft	
35	Preparation of septic tank with bricks masonry of size 8'×5'×6' depth covering RCC Slab etc. Complete in all respect or as directed by Engineer/In-Charge.	2 Nos		Per No	
36	Providing/Applying White washing, distempering and weather shield with 3 coats on new surface inner and outer side. Complete in all respect or as directed by Engineer/In-Charge.	20000 sqft		100 sqft	
37	Supplying, installation, testing and commissioning Electric wiring of light or fan points from point to switch with 7/0.29 Pakistan cable or equivalent with all accessories such as PVC concealed conduit PPI switch fixed on plastic sheet in plastic box, ceiling rose and holder, fan box, half switch etc. Complete in all respect or as directed by Engineer/In-Charge.	200 Points		Per point	
38	Supplying, installation, testing and commissioning of powder coated main switch board for bungalows 2 Nos. including main breakers and sub-breakers of required sizes. Complete in all respect or as directed by Engineer/In-Charge.	02 Nos		Per No	
Boundary wall at PMDC Officers Colony					
39	Excavation in foundation of room and other structure including dag-belling, dressing, refilling around structure with excavated earth watering and ramming lead up to one chain lift upto 3ft. Complete in all respect or as directed by Engineer/In-Charge.	1980 cft		1000 cft	

40	Providing & Laying P.C.C Lien concrete 1:2:4 in foundation of Boundary wall of bungalow. Complete in all respect or as directed by Engineer/In-Charge.	330 cft		100 cft	
41	Providing and laying of reinforced cement concrete 1:2:4 using wash crushed graded in require shape (Margala) and design in roof slab and other structure member laid in position. Complete in all respect or as directed by Engineer/In-Charge.	8 cft		Per cft	
42	Supply/Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire and labor charges for binding of steel reinforcement deformed bars gate pillars etc. 60 Grade. Complete in all respect or as directed by Engineer/In-Charge.	50 kgs		100 kgs	
43	Providing and laying Course Rubble stone masonry hammer dressed in foundation of boundary wall of bungalow Ratio 1:4. Complete in all respect or as directed by Engineer/In-Charge.	1375 cft		100 cft	
44	Providing and laying Pacca Bricks masonry work with 1:4 cement sand mortar in super-structure. Complete in all respect or as directed by Engineer/In-Charge.	1065 cft		100 cft	
45	Providing/laying cement concrete plan including, placing compacting, finising and curing complete 1:2:4. Complete in all respect or as directed by Engineer/In-Charge.	45 cft		100 cft	
46	Providing and laying cement plaster 1:4 cement sand mortar in boundary wall complete in all respect 3/4inch thick. Complete in all respect or as directed by Engineer/In-Charge.	3036 sqft		100 sqft	
47	Providing and Fixing of iron door comprising of specified leaves made 1-1/4 inch×1-1/4 inch×3/16" MS angle iron for leaf frame, diagonal and horizontal braces duly welded with MS sheet 18-SWG tower bolt or as per site requirement and painting 3 coats. Complete in all respect or as directed by Engineer/In-Charge.	140 sqft		Per sqft	
G. Total in PKR inclusive of all taxes (Lot – 02 Only) Construction of 02 Nos. Bungalows and Boundary Wall at PMDC Salt Mines, Khewra.					



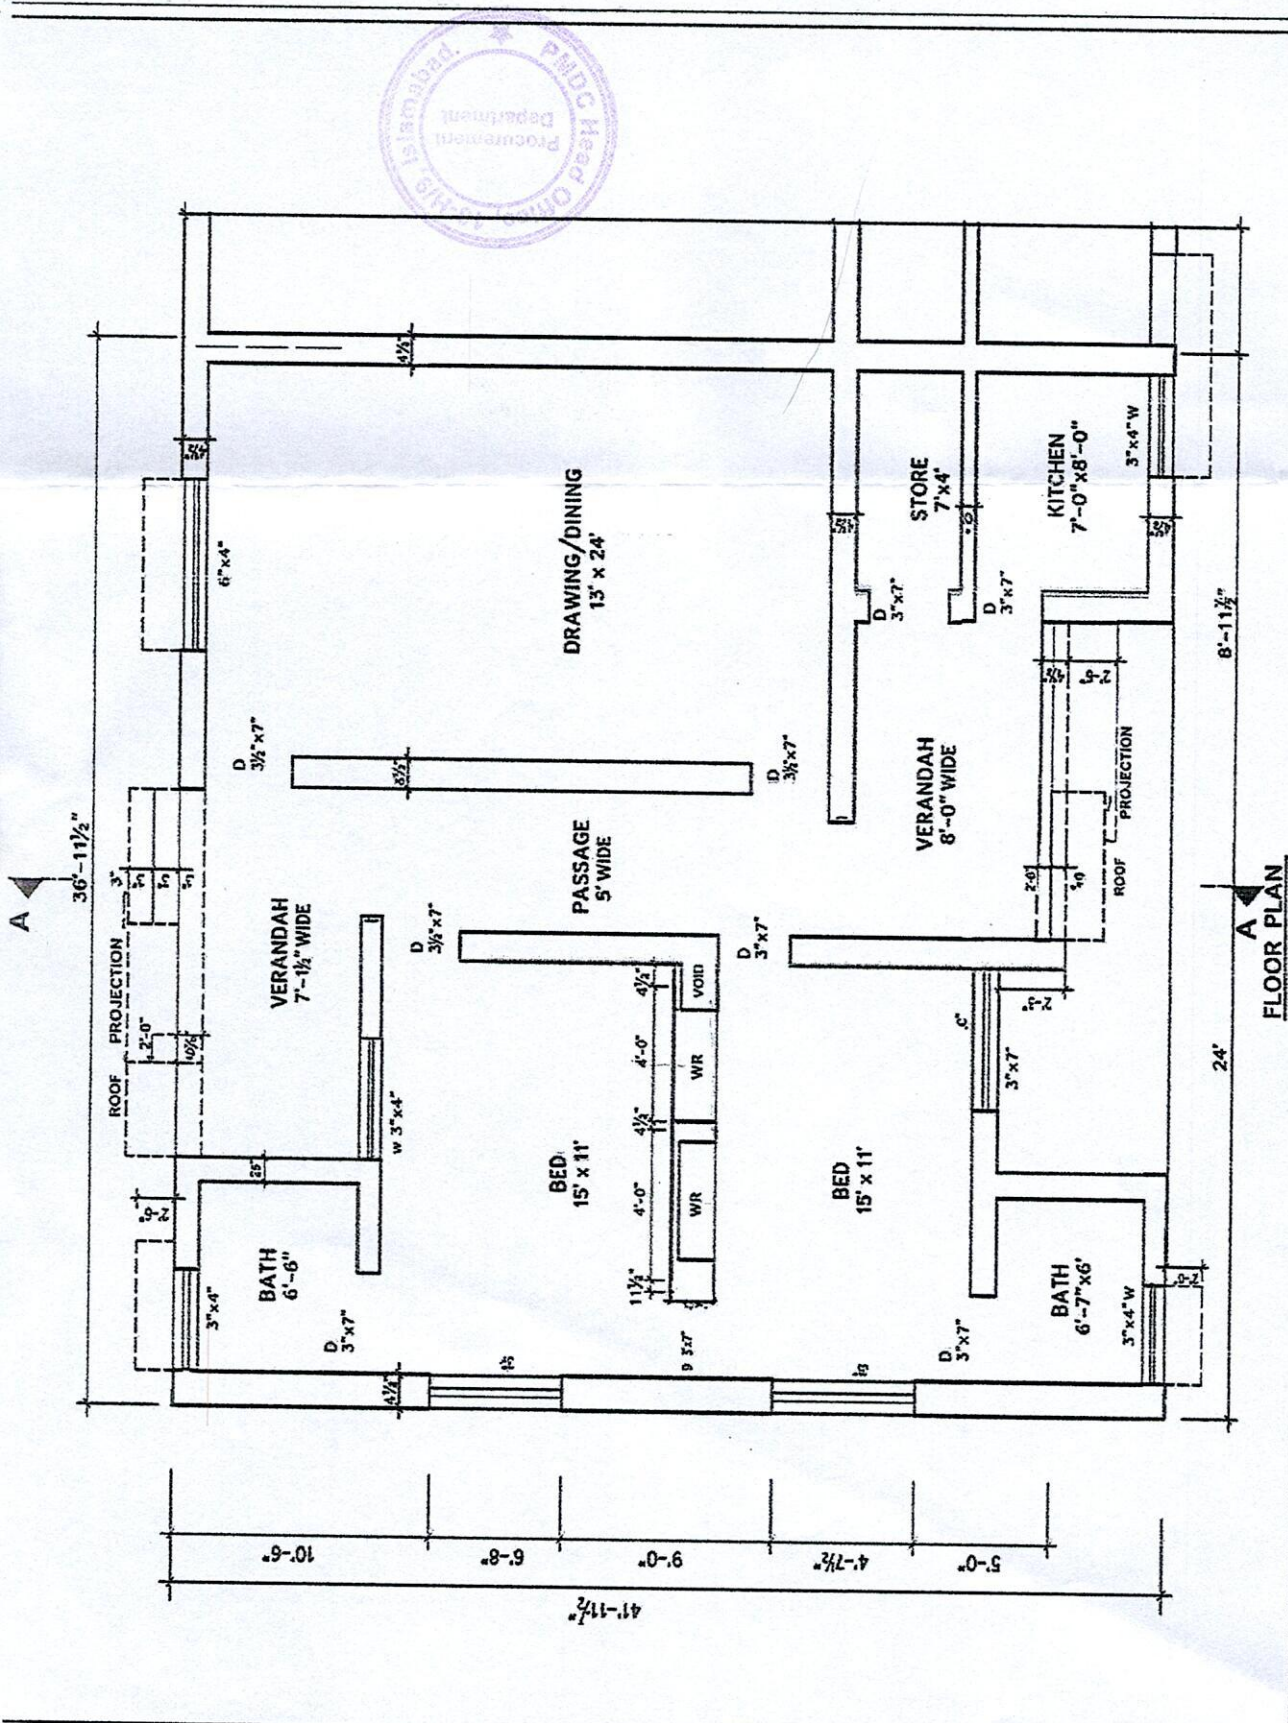

Title:- **Construction Of Bungalows at Officer Colony Khewra.**
 Designed By:- *Ali Taskeen*
 Civil Assistant