

LOCAL PURCHASE DIVISION – PAKISTAN NAVY

TERMS & CONDITIONS FOR INVITATION TO TENDERS TO BE OPENED ON 22-07-2026

1. ALL FIRMS (REGISTERED / UN REGISTERED) REQUIRED TO PAY TENDER FEES @ RS 500/- PER QUOTATION IN SHAPE OF BANK DRAFT / PAY ORDER/ CROSS CHEQUE / ONLINE TRANSFER (NON REFUNDABLE) IN FAVOUR OF “PN NONPUBLIC FUND LP DIVISION IT FUND ACCOUNT” (ACCOUNT NO. PK04 MEZN 0001 7001 0321 0586)
2. IN CASE OF ONLINE PAYMENT, PROOF OF ONLINE DEPOSIT IN ACCOUNT NO. PK04 MEZN 0001 7001 0321 0586 IS TO BE ATTACHED WITH RELEVANT QUOTATION.
3. FURTHERMORE, ALL NON REGISTERED FIRMS ARE TO PAY BG @ 5% OF THE PURCHASE ORDER VALUE, IN SHAPE OF PAY ORDER / BANK DRAFT VALID FOR SIX (6) MONTHS. THEREAFTER PURCHASE ORDER WILL BE ISSUED.
4. TO AVOID PAYMENT OF BG, ALL NON REGISTERED FIRMS ARE ENCOURAGED TO GET THEMSELF REGISTER WITH HQ COMLOG. FOR DETAILS PLEASE CONTACT SO CONTRACT ON 021-48506138.

5. STANDARD DELIVERY TIME OF LOCALLY AVAILABLE ITEMS IS 15 DAYS AND IMPORTED ITEMS IS 45 DAYS.

6. LAB TESTING CHARGES IF ANY WILL BE BORNE BY FIRM.

7. FOR ANY QUERY FIRM MAY CONTACT LOCAL PURCHASE DIVISION, THROUGH TELEPHONE, VIA EMAIL OR WHATSAPP

EMAIL: clp@paknavy.gov.pk, localpurchasedivision@gmail.com

PHONE: 021-48508524, 48508828,

WHATSAPP NO. 92-322-0188121 (Message Only)

TENDER BULLETIN

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
1	DGT105 370	NIL	551070519913 4 / KAIL WOOD SLEEPER GRADE-A (LOCAL)	KAIL WOOD (TIMBER)	9 / CUBIC FOOT	NIL	NIL	LOCAL MARKET	LOCAL MARKET		<u>TECHNICAL SPECIFICATION</u> - size: LENGTH: 8 TO 16 FEET WIDTH: 8 to 14 INCH THICKNESS: 6 to 8 INCHES SPECIFICATIONS: psg: 69 (FOR VISUAL INSPECTION ONLY) moisture contents: 06 % to 18% <u>GENERAL SPECIFICATION</u> - size: LENGTH: 8 TO 16 FEET WIDTH: 8 to 14 INCH THICKNESS: 6 to 8 INCHES SPECIFICATIONS: psg: 69 (FOR VISUAL INSPECTION ONLY) moisture contents: 06 % to 18%	
2	DGE105 428	YCR105 or 1260	830578516309 0 / CERAMIC FIBER CLOTH	GENRAL USE	13 / METER	YCR105		OEM:CHINA MANUFACTURERS NINGBO RUIFENG SEALING MATERIAL COMPANY LTD KUANGVAN TOWN CIXI : 86-574-63531211.63531433.	PANASONIC SADDAR KARACHI. TECHNO POWER SYSTEM		<u>TECHNICAL SPECIFICATION</u> - size= width= 60.00 inCH (1,524 MM), thickness= 48 mils (1.22 MM), length= 50.00 yards PER ROLL (45.72 METER PER ROLL), weight= 24.00 oz/ sq yd, colour = white, temperature resistance= 700 °C (degree centigrade), max thermal conductivity= 0.16 w/m.K <u>GENERAL SPECIFICATION</u> - size= width= 60.00 inCH (1,524 MM), thickness= 48 mils (1.22 MM), length= 50.00 yards PER ROLL (45.72 METER PER ROLL), weight= 24.00 oz/ sq yd, colour = white, temperature resistance= 700 °C (degree centigrade), max thermal conductivity= 0.16 w/m.K	
3	DGE101	6540967	451001492292	Vacuum Toilet	2 /	Evac, 910	0	1445 HUNTWOOD DR	EVAC		<u>TECHNICAL SPECIFICATION</u> -	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
	721		8 / Toilet Bowl		EACH/NUMBER	Wall Prestige Silent		CHERRY VALLEY IL	NORTH AMERICA INC.		GENERAL SPECIFICATION -	
4	DGE103452	ASTM D 6413	721050515517 1 / FIRE RETARDANT SPRING MATTRESS (L6. 5"XW2'XH6)	MATRESSES FOR BED	30 / EACH/NUMBER			LOCAL ADDRESS:AL-KHAIR HOUSE-43-T,AL-KHAIR CHOWK,AL-KHAIR ROAD GULBERG II, LAHORE-54660 PAKISTAN TEL: 042-5716580-86 FAX: 042-5716588,5753719.	AL-KHAIR HOUSE-43-T		TECHNICAL SPECIFICATION - MATERIAL SPRING: IMPORTED STEEL WIRE(BONNEL/HELICAL) SPRING STRENGTH: 1500-1800N/MM2 COVERING FABRIC: FIRE RETARDANT FOAM: GOOD QUALITY FOAM FELT SHEET (NAMDA): GOOD QUALITY FELT STEEL INTERNAL FABRIC: IMPORTED NON WOVEN FABRIC JOINTING CLIP & BRING: IMPORTED GOOD QUALITY COLOR; AS PER APPROVED BY PAKISTAN NAVY (SAMPLE COLOUR & SHADES TO BE PROVIDED FOR APPROVAL) GENERAL SPECIFICATION - MATERIAL SPRING: IMPORTED STEEL WIRE(BONNEL/HELICAL) SPRING STRENGTH: 1500-1800N/MM2 COVERING FABRIC: FIRE RETARDANT FOAM: GOOD QUALITY FOAM FELT SHEET (NAMDA): GOOD QUALITY FELT STEEL INTERNAL FABRIC: IMPORTED NON WOVEN FABRIC JOINTING CLIP & BRING: IMPORTED GOOD QUALITY COLOR; AS PER APPROVED BY PAKISTAN NAVY (SAMPLE COLOUR & SHADES TO BE PROVIDED FOR APPROVAL)	
5	DGE101134	100-65F	792099300899 7 / CLEANING LINT FREE CLOTH (GUC ITEM)	CLEANING CLOTH	140 / EACH/NUMBER	NO DATA AVAILABLE		UK		MEMO HCG/MS D/03/336 DT 2/7/08	TECHNICAL SPECIFICATION - Material: 100% polyester made with continuous filament yarn for lowest possible particle generation. Type: Knitted Pattern: Line structure Weight: (250-270) GSM (Calculated with the help of GSN cutting and measuring scale). Colour: White, Blue Absorption: 354.7 g/sqm in water Rate of Absorbency: below 1	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
6	DGE102002	QA263527	402099083318 4 / ROPE FIBROUS 8 STRAND, DIA 48MM,	-	220 / METER	NO DATA AVAILAB LE		UK			second Lint Free: less than 30 counts of 25 micron above particles (Gelbo test method). Cutting: Laser cut sealed edges (+/- 3mm accuracy). <u>GENERAL SPECIFICATION</u> - Material: 100% polyester made with continuous filament yarn for lowest possible particle generation. Type: Knitted Pattern: Line structure Weight: (250-270) GSM (Calculated with the help of GSN cutting and measuring scale). Colour: White, Blue Absorption: 354.7 g/sqm in water Rate of Absorbency: below 1 second Lint Free: less than 30 counts of 25 micron above particles (Gelbo test method). Cutting: Laser cut sealed edges (+/- 3mm accuracy). <u>TECHNICAL SPECIFICATION</u> - SPECIFICATION: 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO-10556. 2. 48-MM DIA, BERTHING HAWSER BLK CONT FILAMENT POLYESTER & SS POLYPROPYLENE, 3. MIN BREAKING LOAD: 36.5 TONNES, 4. SUPPLIED IN 220 MTR COIL 5. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. 6. SUPPLY FIRM SHALL OBTAIN AND FURNISH MANUFACTURE CERTIFICATE TO PN AS SAME QUALITY/ STANDARD AS BEING PROVIDED TO MoD (UK)/ RN/ RELATED COUNTRY. 7. ROPE ARE TO BE SUPPLIED WITH VALID LLOYD'S/ BSI/ IACS MEMBER SOCIETY CERTIFICATION. 8. OEM ADDRESS: MARLOW ROPES LTD HAILSHAM EAST SUSSEX UNITED KINGDOM, Phone: +44(0)1323 444	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											444 EMAIL: sales@marlowropes.com <u>GENERAL SPECIFICATION -</u> SPECIFICATION: 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO-10556. 2. 48-MM DIA, BERTHING HAWSER BLK CONT FILAMENT POLYESTER & SS POLYPROPYLENE, 3. MIN BREAKING LOAD: 36.5 TONNES, 4. SUPPLIED IN 220 MTR COIL 5. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. 6. SUPPLY FIRM SHALL OBTAIN AND FURNISH MANUFACTURE CERTIFICATE TO PN AS SAME QUALITY/ STANDARD AS BEING PROVIDED TO MoD (UK)/ RN/ RELATED COUNTRY. 7. ROPE ARE TO BE SUPPLIED WITH VALID LLOYD'S/ BSI/ IACS MEMBER SOCIETY CERTIFICATION. 8. OEM ADDRESS: MARLOW ROPES LTD HAILSHAM EAST SUSSEX UNITED KINGDOM, Phone: +44(0)1323 444 444 EMAIL: sales@marlowropes.com	
7	DGE100 946	QA263527	402099083318 4 / ROPE FIBROUS 8 STRAND, DIA 48MM,	-	880 / METER	NO DATA AVAILAB LE		UK		MARLOW ROPE LTD SOUTH ROAD HAILSHA M EAST SUSSEX UNITED KINGDO M	<u>TECHNICAL SPECIFICATION -</u> SPECIFICATION: 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO-10556. 2. 48-MM DIA, BERTHING HAWSER BLK CONT FILAMENT POLYESTER & SS POLYPROPYLENE, 3. MIN BREAKING LOAD: 36.5 TONNES, 4. SUPPLIED IN 220 MTR COIL 5. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. 6. SUPPLY FIRM	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											SHALL OBTAIN AND FURNISH MANUFACTURE CERTIFICATE TO PN AS SAME QUALITY/ STANDARD AS BEING PROVIDED TO MoD (UK)/ RN/ RELATED COUNTRY. 7. ROPE ARE TO BE SUPPLIED WITH VALID LLOYD'S/ BSI/ IACS MEMBER SOCIETY CERTIFICATION. 8. OEM ADDRESS: MARLOW ROPES LTD HAILSHAM EAST SUSSEX UNITED KINGDOM, Phone: +44(0)1323 444 444 EMAIL: sales@marlowropes.com <u>GENERAL SPECIFICATION -</u> SPECIFICATION: 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO-10556. 2. 48-MM DIA, BERTHING HAWSER BLK CONT FILAMENT POLYESTER & SS POLYPROPYLENE, 3. MIN BREAKING LOAD: 36.5 TONNES, 4. SUPPLIED IN 220 MTR COIL 5. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. 6. SUPPLY FIRM SHALL OBTAIN AND FURNISH MANUFACTURE CERTIFICATE TO PN AS SAME QUALITY/ STANDARD AS BEING PROVIDED TO MoD (UK)/ RN/ RELATED COUNTRY. 7. ROPE ARE TO BE SUPPLIED WITH VALID LLOYD'S/ BSI/ IACS MEMBER SOCIETY CERTIFICATION. 8. OEM ADDRESS: MARLOW ROPES LTD HAILSHAM EAST SUSSEX UNITED KINGDOM, Phone: +44(0)1323 444 444 EMAIL: sales@marlowropes.com	
8	DGE100 782	P- 295/2400	597000816605 6 / Tape insulation	NIL	20 / EACH/NUMBER	NA	NA	US Postal Code 08701-4537, 1990 RUTGERS BLVD, LAKEWOOD, USA	NITTO, INC, USA		<u>TECHNICAL SPECIFICATION -</u> PMS Item <u>GENERAL SPECIFICATION -</u> PMS Item	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			electrical									
9	DGT99349	NO DATA AVAILABLE	934070514992 3 / MEDIUM DENSITY FIBER BOARD (LASANI) TEAK COLOUR. LAMINATION ONE SIDE, DENSITY 750 KG/CUB to 850 KG/CUB . METER SIZE L:8' W: 4' TH: 6MM, MOISTURE RESISTANT	WOOD WORKS SHIPS&ESTABLISHMENT	4 / SHEET	NO DATA AVAILABLE		PK		SOURCE: M/S MEHRAN ART WOOD SHOP NO 9, PANJETANI HOUSE, SIDDIQ WAHAB ROAD, TIMBER MARKET KARACHI . TEL/ FAX: +92-21-32776064 .MOBILE 0322-2578654.	TECHNICAL SPECIFICATION - SIZE Length: 8 feet Width: 4 feet THickness : 6 MM colour : teak DENSITY 750 KG/CUB TO 850 KG/CUB GENERAL SPECIFICATION - SIZE Length: 8 feet Width: 4 feet THickness : 6 MM colour : teak DENSITY 750 KG/CUB TO 850 KG/CUB	
10	DGT97893		934070514992 4 / MEDIUM DENSITY FIBER BOARD, (LASANI) WHITE COLOUR LAMINATION ONE SIDE DENSITY 750 KG cUB METER SIZE L:8' W: 4' TH: 3MM MOISTURE RESISTANT	WOOD WORKS SHIPS&ESTABLISHMENT	15 / SHEET	NO DATA AVAILABLE		PK		SOURCE: M/S MEHRAN ART WOOD SHOP NO 9, PANJETANI HOUSE, SIDDIQ WAHAB ROAD, TIMBER MARKET KARACHI . TEL/ FAX: +92-21-32776064 .MOBILE	TECHNICAL SPECIFICATION - SIZE: Length: 8 feet Width: 4 feet THickness: 3 MM colour: white SOURCE:M/S MEHRAN ART WOOD SHOP NO 9,PANJETANI HOUSE,SIDDIQ WAHAB ROAD, TIMBER MARKET KARACHI. TEL/ FAX: +92-21-32776064.MOBILE 0322- 2578654. PRICE:RS1350 APPOX PER SHEET,SIZE 8FEETX4FEETX1/8 INCHES. GENERAL SPECIFICATION - SIZE: Length: 8 feet Width: 4 feet THickness: 3 MM colour: white SOURCE:M/S MEHRAN ART WOOD SHOP NO 9,PANJETANI HOUSE,SIDDIQ WAHAB ROAD, TIMBER MARKET KARACHI. TEL/ FAX: +92-21-32776064.MOBILE 0322- 2578654. PRICE:RS1350 APPOX PER SHEET,SIZE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
									0322-2578654.		8FEETX4FEETX1/8 INCHES.	
11	DGB80614	CC500-009	9515505225456 / ALUMINUM SHEET (4FT X 8FT), THICKNESS 1 MM	Customized Container STUS	9 / EACH/NUMBER	-CC500-009	NIL	M/s Global Traders C-39, Naval Housing Scheme Clifton Karachi Cell # 0300-8262549 Tel # 02135877485 Email: Globaltraders39@gmail.com	M/s Global Traders		<u>TECHNICAL SPECIFICATION - ALUMINUM SHEET SIZE (4FT X 8FT), THICKNESS 1 MM POWDER COATED</u> <u>GENERAL SPECIFICATION - ALUMINUM SHEET SIZE (4FT X 8FT), THICKNESS 1 MM POWDER COATED</u>	
12	DGE100649	NIL	4020999237130 / ROPE NYLON, HAWSERLAID, Z-LAY, CIRC: 2.50", NOM DIA: 20MM,	ITSELF	1100 / FATHOM			NAM: MARLOW ROPES LTD ST1: ROPEMAKER PARK, DIPLOCKS WAY STT: EAST SUSSEX CTR: UNITED KINGDOM TEL: 01323 444444 FAX: 01323 444455	UK		<u>TECHNICAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2004, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2005(E), 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2005. 4. LENGTH: PER COIL: 120 FATHOM. 5. OEM COC REQUIRED."</u> <u>6. SPECS: BS4928</u> <u>GENERAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2004, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2005(E), 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2005. 4. LENGTH: PER COIL: 120 FATHOM. 5. OEM COC REQUIRED."</u> <u>6. SPECS: BS4928</u>	
13	SGB65953	DEVS7866	4730995253348 / FLANGE	-	8 / EACH/NUMBER	NO DATA AVAILABLE		UK	MOD (NAVY) SHIP SUPPORT AGENCY DME MC253 ROOM 19 BLOCK B FRAHILL BATH UK		<u>TECHNICAL SPECIFICATION - BS 1400 Inner dia: 1 1/2 inch Pitch circle dia: 3 7/8 inch Outer dia: 5 1/8 inch 04 x holes of 11/16 inch Thickness: 1/2 inch Material: COPPER ALLOY Leaded Gunmetal LG4 as per drawing</u> <u>GENERAL SPECIFICATION - BS 1400 Inner dia: 1 1/2 inch Pitch circle dia: 3 7/8 inch Outer dia: 5 1/8 inch 04 x holes of 11/16 inch Thickness: 1/2 inch Material: COPPER</u>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											ALLOY Leaded Gunmetal LG4 as per drawing	
14	DGE64183	2890S	4240TY5202560 / 3M COMFORT LINE SAFETY GOGGLES 2890S SEALED VERSION	BV	10 / EACH/NUMBER	NA		VHKMHMN	-		<u>TECHNICAL SPECIFICATION - NIL</u> <u>GENERAL SPECIFICATION - NIL</u>	
15	DGE100793	-	5610992004386 / BAG SAND (LOCAL GOOD QUALITY ACCEPTABLE)	DC & FF	50 / KILOGRAMME	NO DATA AVAILABLE		UK	FLOWCR ETE UK LTD THE FLOORIN G TECHNO LOGIES CENTRE BOOTH LANE SANDBA TCH CHESHIR E CW11 3QF UK PH:+44(0) 1270 753000 & FAX :+44 (0)1270 753333		<u>TECHNICAL SPECIFICATION - IN DESCRIPTION ,LOCAL GOOD QUALITY ACCEPTABLE, ADDED VIDE FLAG OFFICER SEA TRANING ME/251/544 DT 11 APRIL 2011.&I(M) DC&FF.</u> <u>GENERAL SPECIFICATION - IN DESCRIPTION ,LOCAL GOOD QUALITY ACCEPTABLE, ADDED VIDE FLAG OFFICER SEA TRANING ME/251/544 DT 11 APRIL 2011.&I(M) DC&FF.</u>	
16	DGE99302	-	5610992004386 / BAG SAND (LOCAL GOOD QUALITY ACCEPTABLE)	DC & FF	5 / KILOGRAMME	NO DATA AVAILABLE		UK	FLOWCR ETE UK LTD THE FLOORIN G TECHNO LOGIES CENTRE BOOTH LANE SANDBA TCH CHESHIR E CW11		<u>TECHNICAL SPECIFICATION - IN DESCRIPTION ,LOCAL GOOD QUALITY ACCEPTABLE, ADDED VIDE FLAG OFFICER SEA TRANING ME/251/544 DT 11 APRIL 2011.&I(M) DC&FF.</u> <u>GENERAL SPECIFICATION - IN DESCRIPTION ,LOCAL GOOD QUALITY ACCEPTABLE, ADDED VIDE FLAG OFFICER SEA TRANING ME/251/544 DT 11 APRIL 2011.&I(M) DC&FF.</u>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
									3QF UK PH:+44(0) 1270 753000 & FAX :+44 (0)1270 753333			
17	DGB97172		0283705711230 / ALUMINIUM ALLOY ANGLE EQUAL SIDED	BR 320 D/1976 UNIT OF AVAIL 12-30 FT LG	320 / METER						<u>TECHNICAL SPECIFICATION - SPECIFICATION:</u> FOR CHEMICAL COMPOSITION BS EN 573-3 OF 2019 + A2: 2022FOR MECHANICAL PROPERTIES BS 755-2 OF 2025 GRADE: ENAW 5083 SIZE: LENGTH OF LEG: 2X2 INCHES. THICKNESS: 1/4 INCHES. WEIGHT PER FEET (POUNDS): 1.02 POUNDS. RUNNING LENGTH: 12 TO 30 FEET. <u>GENERAL SPECIFICATION - SPECIFICATION:</u> FOR CHEMICAL COMPOSITION BS EN 573-3 OF 2019 + A2: 2022FOR MECHANICAL PROPERTIES BS 755-2 OF 2025 GRADE: ENAW 5083 SIZE: LENGTH OF LEG: 2X2 INCHES. THICKNESS: 1/4 INCHES. WEIGHT PER FEET (POUNDS): 1.02 POUNDS. RUNNING LENGTH: 12 TO 30 FEET.	
18	DGE102563	BS2052 , DEF STAN 40-3	0350595713246 / SPUN YARN SISAL S TWIST R. FROOFED 4/20 YARN LENGTH PER COIL 608-5% (FM)		120 / KILOGRAMME						<u>TECHNICAL SPECIFICATION - 1.</u> Country of Origin 59- UK 2. End user Indicated Ops (for sea securing the items during sea and harbor) <u>GENERAL SPECIFICATION - 1.</u> Country of Origin 59- UK 2. End user Indicated Ops (for sea securing the items during sea and harbor)	
19	DGE100947	NO DATA AVAILABE	0350599233576 / FENDER MARINE ROUND SISAL WT 71 LBS OVERALL DIA 2'6 INTERNAL DIA 10"	MARINE ROUND SISAL WT 71 LBS OVERALL DIA 2'6	10 / EACH/NUMBER						<u>TECHNICAL SPECIFICATION - MARINE ROUND SISAL WT 71 LBS OVERALL DIA 2'6" INTERNAL DIA 10"</u> <u>GENERAL SPECIFICATION - MARINE ROUND SISAL WT 71 LBS OVERALL DIA 2'6" INTERNAL DIA 10"</u>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
20	DGE101308	NO DATA AVAILABLE	047659000006 3 / GLOVES- LEATHER RIGHT HAND		82 / EACH/N UMBER						TECHNICAL SPECIFICATION - Size, colour & material: as per sample size: 9 1/2 - 10 GENERAL SPECIFICATION - Size, colour & material: as per sample size: 9 1/2 - 10	
21	DGE101669	U1901 AND P35M	041459923069 9 / PACKING ASSY MICA SZ. 1.5/32, OD. 3/4, I/D 13/64 2 PERSET SQ. C/S		2 / SET						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
22	DGE101449	NO DATA AVAILABLE	055979002055 2 / INSULATION TAPE ELECTRICAL SHRINKABLE WD 2IN RUBBER	GENERAL ELECTRIC USE	35 / ROLL						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
23	DGE100785	NO DATA AVAILABLE	046254600578 4 / TAPE- BROWN- PAPER- GUMMED (DTLD. NSD/TD/19/286 DT.09		70 / ROLL	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
24	DGE105429	NIL	047659000775 8 / GLOVES SEAMLESS DIPPED RUBBER		210 / PAIR	202- GNFG					TECHNICAL SPECIFICATION - a. Product Code: GL 897 Black Nitrile Gloves b. Thickness: 2.3 mil c. Size: AVAILABLE SIZES STANDARD SIZE (FIT TO ALL) d. 13g/ 15g polyester & nylon liners Nitrile smooth finish full coated e. Specification 13g/ 15g polyester & nylon liners Nitrile smooth finish full coated f. Application Paints, Oils, Gases, Metal etc GENERAL SPECIFICATION - a. Product Code: GL 897 Black Nitrile Gloves b. Thickness: 2.3 mil c. Size: AVAILABLE SIZES STANDARD SIZE (FIT TO ALL) d. 13g/ 15g polyester & nylon liners Nitrile	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											smooth finish full coated e. Specification 13g/ 15g polyester & nylon liners Nitrile smooth finish full coated f. Application Paints, Oils, Gases, Metal etc	
25	DGE100 883	C-268	047659943055 9 / BRUSH VARNISH TYNEX FLAT SQUARE EDGE WD.4		3 / EACH/N UMBER						TECHNICAL SPECIFICATION - stock thickness: 01 inch expose length: 3.25 inch specs bs2992 table 8 GENERAL SPECIFICATION - stock thickness: 01 inch expose length: 3.25 inch specs bs2992 table 8	
26	DGE101 140	C-268	047659943055 9 / BRUSH VARNISH TYNEX FLAT SQUARE EDGE WD.4		14 / EACH/N UMBER						TECHNICAL SPECIFICATION - stock thickness: 01 inch expose length: 3.25 inch specs bs2992 table 8 GENERAL SPECIFICATION - stock thickness: 01 inch expose length: 3.25 inch specs bs2992 table 8	
27	DGE101 633	LETTER NO.E- I/4927/A/4 45DT0509 02	046159000391 4 / CLOTH POLESHING		25 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
28	DGE102 119	nil	035059571312 1 / Rope Nylon, Hawser laid, White, 3- Strand, Cir: 1- Inch, Diameter: 8-MM		120 / FATHO M						TECHNICAL SPECIFICATION - SPECIFICATION OF ITEM 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED TEST CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S/BSI TEST CERTIFICATE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											REQUIRED AS PER ISO 2307 OF 2019. <u>GENERAL SPECIFICATION</u> - SPECIFICATION OF ITEM 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED TEST CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S/BSI TEST CERTIFICATE REQUIRED AS PER ISO 2307 OF 2019.	
29	DGE102 867	nil	035059571312 1 / Rope Nylon, Hawser laid, White, 3- Strand, Cir: 1- Inch, Diameter: 8-MM		120 / FATHO M						TECHNICAL SPECIFICATION - SPECIFICATION OF ITEM 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED TEST CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											MOD (UK)/RN/RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S/BSI TEST CERTIFICATE REQUIRED AS PER ISO 2307 OF 2019. <u>GENERAL SPECIFICATION</u> - SPECIFICATION OF ITEM 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED TEST CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S/BSI TEST CERTIFICATE REQUIRED AS PER ISO 2307 OF 2019.	
30	DGB102 586		028359571143 2 / ROD NAVAL BRASS HEX A/F 1.01" WT PER FT 3.244 LB, (RUNNING LENGTH: MINIMUM 6 FT)	SERVICE PUMP	5 / METER						<u>TECHNICAL SPECIFICATION</u> - BSEN 12163 OF 2016 GRADE CW 712 (R) M RUNNING LENGTH: minimum 6 ft <u>GENERAL SPECIFICATION</u> - BSEN 12163 OF 2016 GRADE CW 712 (R) M RUNNING LENGTH: minimum 6 ft	
31	DGB963 57		028359571150 5 / ROD COPPER RD ANNEALED DIA 1.50 INCH		11 / METER						<u>TECHNICAL SPECIFICATION</u> - NO DATA AVAILABLE <u>GENERAL SPECIFICATION</u> - NO DATA AVAILABLE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			WT PER FT6.849LBS									
32	DGB102631		0283595711438 / ROD NAVAL BRASS HEX SIZE A/F 1.86 INCH	GENERAL PURPOSE (FOR SHIPS)	5 / METER						TECHNICAL SPECIFICATION - BSEN 12163 OF 1998 GRADE CW 712 R(M)GENERAL SPECIFICATION - BSEN 12163 OF 1998 GRADE CW 712 R(M)	
33	DGE58431		0421599425637 / FILING CABINET SIZE, 4- DRAWERS W/LOCK combination AND COMPRESSO R PLATES GREY GUAGE SWG:22 SIZE; W18 INCH		12 / EACH/N UMBER						TECHNICAL SPECIFICATION - GUAGE SWG:22 SIZE; Width:18 INCH. Dia:24 1/2 INCH. HEIGHT.52 INCH. MPBW CODE: 01-18-114 REQUIRED MATERIAL STEEL REQUIREMENT OF LOCK 01 LOCK WITH OVERALL 4 DRAWERS Item locally available and accepted by end userGENERAL SPECIFICATION - GUAGE SWG:22 SIZE; Width:18 INCH. Dia:24 1/2 INCH. HEIGHT.52 INCH. MPBW CODE: 01-18-114 REQUIRED MATERIAL STEEL REQUIREMENT OF LOCK 01 LOCK WITH OVERALL 4 DRAWERS Item locally available and accepted by end user	
34	DGB97178		0283595711447 / ROD NAVAL BRASS RD DIA 01 INCH	GENERAL USE	1 / METER						TECHNICAL SPECIFICATION - BS EN 12163 OF 1998, GRADE: CW712R (M) SIZE: RD DIA 01 INCH, WT PER FT :(LBS), R-LENGTH-03 METERS (EACH)GENERAL SPECIFICATION - BS EN 12163 OF 1998, GRADE: CW712R (M) SIZE: RD DIA 01 INCH, WT PER FT : (LBS), R-LENGTH-03 METERS (EACH)	
35	DGB96364		0283595711457 / ROD NAVAL BRASS RD DIA 2.25" WT PER FT 14.73(LB)		6.35 / METER						TECHNICAL SPECIFICATION - Specifications: BSEN 12163 of 1998 Grade CW 712R (M), Running Length (Min): 02 meterGENERAL SPECIFICATION - Specifications: BSEN 12163 of 1998 Grade CW 712R (M), Running Length (Min): 02 meter	
36	DGB97497		0283595711459 / ROD NAVAL BRASS		4 / METER						TECHNICAL SPECIFICATION - BS EN-12163 DESIGNATION: CW- 719R, R-340 SYMBOL: CU zN 39 SN	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			RD DIA.2.50 INCH WT PER MTR 27.49 KG								1GENERAL SPECIFICATION - BS EN-12163 DESIGNATION: CW-719R, R-340 SYMBOL: CU zN 39 SN 1	
37	DGE101 442	NO DATA AVAILABL E	045159451001 3 / OIL-CLOTH PAINTED FOR TABLE COVERS WHITE WIDTH 50 INCH	GENERAL USED	55 / METER						TECHNICAL SPECIFICATION - AS PER STOCK SAMPLE HELD BY CINS GENERAL SPECIFICATION - AS PER STOCK SAMPLE HELD BY CINS	
38	DGE101 662	0414-5160	041459923093 4 / SHEET, ASBESTOS, COMPRESSE D TH 1/16", WD 54"X63" IN WT PER SHEET 22LBS		3 / KILOGR AMME						TECHNICAL SPECIFICATION - BS2815, GRADE A, FOR WATER, STEAM OIL, HYDROCARBONS AND AIR (COLOURED RED BOTH SURFACES) GENERAL SPECIFICATION - BS2815, GRADE A, FOR WATER, STEAM OIL, HYDROCARBONS AND AIR (COLOURED RED BOTH SURFACES)	
39	DGE102 831	0414-5162	041459923093 5 / ASBESTOS SHEET COMPRESSE D,	GENE RL PERPOSE	15 / KILOGR AMME						TECHNICAL SPECIFICATION - a. Standard/ Grade: BS 2815, Grade A b. Length = 60 Inch c. Width = 60-80 INCH d. Thickness= 3-MM e. Approx. Wt. per Sheet LBS. 44 F. COLOUR; RED, G. MATERIAL: ASBESTOS BS-2815 GENERAL SPECIFICATION - a. Standard/ Grade: BS 2815, Grade A b. Length = 60 Inch c. Width = 60-80 INCH d. Thickness= 3-MM e. Approx. Wt. per Sheet LBS. 44 F. COLOUR; RED, G. MATERIAL: ASBESTOS BS-2815	
40	DGE103 044	NIL	035059571323 1 / ROPE SISAL, HAWSERLAID, 3-STRD, CIRC: 1, 1/8 INCH DIA: 10-MM		1500 / FATHO M						TECHNICAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1181-2004, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM COC REQUIRED, 5. LENGTH PER COIL: 120 FATHOM. 6. VALID	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											LLOYD'S DNV/ BSI/ CERTIFICATE OF ANY IACS MEMBER SOCIETY IS REQUIRED INDICATING BATCH/ LOT NUMBER FOR IDENTIFICATION AND BREAKING STRENGTH OF STORES. <u>GENERAL SPECIFICATION</u> - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1181-2004, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM COC REQUIRED, 5. LENGTH PER COIL: 120 FATHOM. 6. VALID LLOYD'S DNV/ BSI/ CERTIFICATE OF ANY IACS MEMBER SOCIETY IS REQUIRED INDICATING BATCH/ LOT NUMBER FOR IDENTIFICATION AND BREAKING STRENGTH OF STORES.	
41	DGH103 212		021159119995 3 / PLATE STEEL CARBON MILD BLACK 5000X1500X10 MM		2 / EACH/N UMBER						<u>TECHNICAL SPECIFICATION</u> - BSEN 10025-2 OF 2019, GRADE S275 JR, THICKNESS TOLERANCE LIMIT: "CLASS C" IN TABLE 1 OF BSEN 10029 <u>GENERAL SPECIFICATION</u> - BSEN 10025-2 OF 2019, GRADE S275 JR, THICKNESS TOLERANCE LIMIT: "CLASS C" IN TABLE 1 OF BSEN 10029	
42	DGH103 013	DNC S15	021159119996 8 / STEEL PLATE CARBON SIZE 2500X1250X6 MM. **SIZE 2500X1220X6 MM (Only acceptable against demand based		10 / EACH/N UMBER						<u>TECHNICAL SPECIFICATION</u> - SPECIFICATION FOR ALL 17 ITEMS: BSEN:10025. STEEL GRADE:5275 JR. ALL INFORMATION AMENDED VIDE CINS LETTER INS/EM-8047/10/3895 DT 24 SEP 2010. 2. bsen-10025 part-2 of 2004 grade: s-275 jr <u>GENERAL SPECIFICATION</u> - SPECIFICATION FOR ALL 17 ITEMS: BSEN:10025. STEEL GRADE:5275 JR. ALL INFORMATION AMENDED VIDE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			LPO).								CINS LETTER INS/EM-8047/10/3895 DT 24 SEP 2010. 2. bsen-10025 part-2 of 2004 grade: s-275 jr	
43	DGH103 901	DNC S15	021159119996 8 / STEEL PLATE CARBON SIZE 2500X1250X6 MM. **SIZE 2500X1220X6 MM (Only acceptable against demand based LPO).		14 / EACH/N UMBER						TECHNICAL SPECIFICATION - SPECIFICATION FOR ALL 17 ITEMS: BSEN:10025.STEEL GRADE:5275 JR. ALL INFOMATION AMENDED VIDE CINS LETTER INS/EM-8047/10/3895 DT 24 SEP 2010. 2. bsen-10025 part-2 of 2004 grade: s-275 jrGENERAL SPECIFICATION - SPECIFICATION FOR ALL 17 ITEMS: BSEN:10025. STEEL GRADE:5275 JR. ALL INFOMATION AMENDED VIDE CINS LETTER INS/EM-8047/10/3895 DT 24 SEP 2010. 2. bsen-10025 part-2 of 2004 grade: s-275 jr	
44	DGH103 531	DNC S15	021159119996 8 / STEEL PLATE CARBON SIZE 2500X1250X6 MM. **SIZE 2500X1220X6 MM (Only acceptable against demand based LPO).		1 / EACH/N UMBER						TECHNICAL SPECIFICATION - SPECIFICATION FOR ALL 17 ITEMS: BSEN:10025.STEEL GRADE:5275 JR. ALL INFOMATION AMENDED VIDE CINS LETTER INS/EM-8047/10/3895 DT 24 SEP 2010. 2. bsen-10025 part-2 of 2004 grade: s-275 jrGENERAL SPECIFICATION - SPECIFICATION FOR ALL 17 ITEMS: BSEN:10025. STEEL GRADE:5275 JR. ALL INFOMATION AMENDED VIDE CINS LETTER INS/EM-8047/10/3895 DT 24 SEP 2010. 2. bsen-10025 part-2 of 2004 grade: s-275 jr	
45	DGB103 502		021859571185 7 / PIPING STEEL SEAMLESS OUTER DIA 219.710X8MM TH RAND LG4. 5-6.0M		18.3 / METER						TECHNICAL SPECIFICATION - 1. bs EN 10216-2 STEEL GRADE P 265 GH 2. INTERNAL DIA = 08 INCH cold finishingGENERAL SPECIFICATION - 1. bs EN 10216-2 STEEL GRADE P 265 GH 2. INTERNAL DIA = 08 INCH cold finishing	
46	DGB103 453		021859571185 7 / PIPING STEEL SEAMLESS		18.3 / METER						TECHNICAL SPECIFICATION - 1. bs EN 10216-2 STEEL GRADE P 265 GH 2. INTERNAL DIA = 08 INCH cold finishingGENERAL	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			OUTER DIA 219.710X8MM TH RAND LG4. 5-6.0M								SPECIFICATION - 1. bs EN 10216-2 STEEL GRADE P 265 GH 2. INTERNAL DIA = 08 INCH cold finishing	
47	DGE100 647	NIL	035059923712 9 / ROPE NYLON, HAWSERLAID, 3-STRANDS, CIRCI 3", NOM DIA: 24MM, Z- LAY, TYPE-1, MINIMUM BREAKING LOAD : 12 TONS	STRENGTH 11.800 TONS UNIT OF AVAILABILIT	220 / FATHO M						<u>TECHNICAL SPECIFICATION - 1.</u> TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. <u>GENERAL</u> <u>SPECIFICATION - 1.</u> TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7. OEM OF	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES.	
48	DGB103061		0214599410019 / BOLT MACHINE STEEL UNC class 2a HEX HD SZ 0.625 X3.000X1.500 IN	BR-320 D/78	100 / EACH/NUMBER						TECHNICAL SPECIFICATION - AISI PD 970:2005, MATERIAL GRADE 708M40/ 42CRM04 AUTHORITY : AS PER BR-320D OEM COC/MTC REQUIREDGENERAL SPECIFICATION - AISI PD 970: 2005, MATERIAL GRADE 708M40/ 42CRM04 AUTHORITY : AS PER BR-320D OEM COC/MTC REQUIRED	
49	DGB99209		0214599410019 / BOLT MACHINE STEEL UNC class 2a HEX HD SZ 0.625 X3.000X1.500 IN	BR-320 D/78	36 / EACH/NUMBER						TECHNICAL SPECIFICATION - AISI PD 970:2005, MATERIAL GRADE 708M40/ 42CRM04 AUTHORITY : AS PER BR-320D OEM COC/MTC REQUIREDGENERAL SPECIFICATION - AISI PD 970: 2005, MATERIAL GRADE 708M40/ 42CRM04 AUTHORITY : AS PER BR-320D OEM COC/MTC REQUIRED	
50	DGE102424	NIL	0350599237135 / ROPE NYLON, HAWSERLAID, 3-STRAND, NOM DIA: 48 MM, TYPE-1	H 41.200 TONS UNIT OF AVAILABILITY 726	120 / FATHOM						TECHNICAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. <u>GENERAL SPECIFICATION</u> - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES.	
51	DGB96243		0271799101727 / TAP THREAD CUTTING HS BSF T/S20. 0TPI0.373X1. 250X0.293X2. 937"		17 / EACH/NUMBER						<u>TECHNICAL SPECIFICATION</u> - NO DATA AVAILABLE <u>GENERAL SPECIFICATION</u> - NO DATA AVAILABLE	
52	DGE63458	NO DATA AVAILABLE	0413546004803 / PVC PIPE DIA 1.50"		150 / METER	NO DATA AVAILABLE					<u>TECHNICAL SPECIFICATION</u> - a) Material: Poly Vinyl Chloride b) Diameter 1.5 inch c) Environmental	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											friendly material. d) Heat resistant. e) Fire resistant. f) Reputable company. <u>GENERAL SPECIFICATION - a)</u> Material: Poly Vinyl Chloride b) Diameter 1.5 inch c) Environmental friendly material. d) Heat resistant. e) Fire resistant. f) Reputable company.	
53	DGB103 461		021259571002 7 / BAR STEEL CARBON HOT ROLLED RD DIA 3-1/2", WT PER FT 32.71 LBS		2 / METER						<u>TECHNICAL SPECIFICATION -</u> SPECS PD970:2005, Material Grade 070M20, Running Length: 6 meter <u>GENERAL SPECIFICATION -</u> SPECS PD970:2005, Material Grade 070M20, Running Length: 6 meter	
54	DGH103 955	BS EN 10025-2/2004, MATERIAL GRADE S 275 JR	021259571071 8 / ANGLE STEEL CARBON E/S BLACK 1.25 X 1.25 X 0.25 INCH		100 / METER						<u>TECHNICAL SPECIFICATION -</u> RUNNING LENGTH: 6.5 METER BS EN 10025-2/2004, mAterial grade s 275 jr <u>GENERAL SPECIFICATION -</u> RUNNING LENGTH: 6.5 METER BS EN 10025-2/2004, mAterial grade s 275 jr	
55	DGH103 964		021259571079 8 / Angle Steel Carbon Black 05X03-1/2X1/2" LG 40.3"		2 / METER						<u>TECHNICAL SPECIFICATION -</u> BSEN 10025 OF 2004 GRADE S275JR, Running Length: 6 METER FORECASTED QTY: 103 MTR MATERIAL TEST CERTIFICATE REQUIRED <u>GENERAL SPECIFICATION -</u> BSEN 10025 OF 2004 GRADE S275JR, Running Length: 6 METER FORECASTED QTY: 103 MTR MATERIAL TEST CERTIFICATE REQUIRED	
56	DGH102 581	BSEN 10025 GRADE S275 JR	021259571072 3 / ANGLE STEEL CARBON BLACK 1-1/2X1-1/2X1/4"		10 / METER						<u>TECHNICAL SPECIFICATION -</u> BSEN 10025 OF 2004 GRADE S275JR MATERIAL TEST CERTIFICATE REQUIRED <u>GENERAL SPECIFICATION -</u> BSEN 10025 OF 2004 GRADE S275JR MATERIAL TEST CERTIFICATE REQUIRED	
57	DGE103 540	C-134	085158000007 6 / DEFENCER EAR C-134 62TD		12 / EACH/NUMBER						<u>TECHNICAL SPECIFICATION -</u> NO DATA AVAILABLE <u>GENERAL SPECIFICATION -</u> NO DATA AVAILABLE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
58	DGE89542	DEF STAN 59-15/1 BS3858 TYPE 2	0559999011139 / INSULATION SLEEVING ELECTRICAL	GENERAL USE FOR TYPE 21 SHIPS	58 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
59	DGE101263	NO DATA AVAILABLE	4240505088705 / CAMOUFLAGE NETS, SIZE 26 X 26 FT	TO COVER/CAMOUFLAGE THE 14.5MM GUNS	1 / EACH/NUMBER						TECHNICAL SPECIFICATION - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D, SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50654D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH & LENGTH: 50 FT WITH CAMOUFLAGE COLOUR. (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH & LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED. GENERAL SPECIFICATION - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D, SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50654D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH & LENGTH: 50 FT WITH CAMOUFLAGE COLOUR. (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH & LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED.	
60	DGE102158	NO DATA AVAILABLE	4240505088705 / CAMOUFLAGE NETS, SIZE 26 X 26 FT	TO COVER/CAMOUFLAGE THE 14.5MM GUNS	1 / EACH/NUMBER						TECHNICAL SPECIFICATION - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D, SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50654D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH & LENGTH: 50 FT WITH CAMOUFLAGE COLOUR. (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH & LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED. <u>GENERAL SPECIFICATION - 1.</u> SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D, SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50654D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
61	DGE102067	NO DATA AVAILABLE	424050508870 5 / CAMOUFLAGE NETS, SIZE 26 X 26 FT	TO COVER/CAMOUFLAGE THE 14.5MM GUNS	1 / EACH/NUMBER						BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH & LENGTH: 50 FT WITH CAMOUFLAGE COLOUR. (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH & LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED. TECHNICAL SPECIFICATION - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D, SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50654D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH & LENGTH: 50 FT WITH CAMOUFLAGE COLOUR. (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH & LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED.	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											GENERAL SPECIFICATION - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D, SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50654D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH & LENGTH: 50 FT WITH CAMOUFLAGE COLOUR. (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH & LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED.	
62	DGE101 450	FEC-32- 5113	424070511240 9 / GAS MASK RESPIRATOR 3M		10 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
63	DGE102 862		422072501370 4 / O RING P/N R18694 SET OF 10		80 / SET						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
64	DGB101 210	CATTLOG NO.(USA)	343971506689 3 /	FOR GENERAL	150 / METER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
		42-059-007	ELECTRODE CUTTING TYPE SEA CUTT SIZE 5/6"X18" (BLUE)	USE							SPECIFICATION - NO DATA AVAILABLE	
65	DGE102000	NIL	402099923712 1 / ROPE NYLON, HAWSERLAID, 3-STRD, CIR 1.00", DIA 0.3125" (8MM)	NGTH 1.330 TONS UNIT OF AVAILABILITY	120 / FATHO M						TECHNICAL SPECIFICATION - 1 TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2 TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3 ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4 OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5 OEM COC REQUIRED, 6 FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7 OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8 LENGTH PER COIL: 120 FATHOM. <u>GENERAL SPECIFICATION - 1 TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2 TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3 ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4 OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5 OEM COC REQUIRED, 6 FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7 OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8 LENGTH PER COIL:</u>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											120 FATHOM.	
66	DGE102 866	NIL	402099923712 1 / ROPE NYLON, HAWSERLAID, 3-STRD, CIR 1.00", DIA 0.3125" (8MM)	NGTH 1.330 TONS UNIT OF AVAILABILITY	120 / FATHO M						TECHNICAL SPECIFICATION - 1 TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2 TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3 ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4 OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5 OEM COC REQUIRED, 6 FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7 OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8 LENGTH PER COIL: 120 FATHOM. GENERAL SPECIFICATION - 1 TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2 TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3 ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4 OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5 OEM COC REQUIRED, 6 FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7 OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8 LENGTH PER COIL: 120 FATHOM.	
67	DGE101 042		402099923713 7 / ROPE NYLON HAWSERLAID,	NOR-SHIPS- USE-NASAR	133.2 / FATHO M						TECHNICAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			3-STRND, Z-LAY, TYPE-1, NOM DIA: 64-MM, CIRC: 08-INCH,								MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. <u>GENERAL SPECIFICATION</u> - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											OF STORES.	
68	DGE100955	BS 2052	402099942504 2 / ROPE SISAL HAWSERLAID CIR 12MM 3 STRAND	MIN BKG LOAD 955 KG	120 / FATHO M						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
69	DGE101124		535000235013 7 / PAPER ABRASIVE 9" X11" WATER PROOF MATERIAL GLASS GRADE 2/0		65 / SHEET						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
70	DGE96918	NO DATA AVAILABL E	562050504233 5 / TILES CERAMIC GLAZED COLOUR WHITE (SIZE LG 9" x WD 4.5" x TH 3/8")	DECK COVERING	300 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
71	DGE99456	MIL-P-15280	564000237482 7 / INSULATION SLEEVING THERMAL		15 / EACH/N UMBER						TECHNICAL SPECIFICATION - mil- p-15280 Sleeve Sizes: LENGTH: 72- INCHES NOMINAL, INNER DIA: 2.625 INCHES NOMINAL, INSULATION Thickness: 0.750 INCHES NOMINAL, COLOR: BLACK, DESIGN FORM: FULL ROUND, SUPPLEMENTARY FEATURES: EXPANDED UNICELLULAR PLASTIC FOAM. GENERAL SPECIFICATION - mil-p- 15280 Sleeve Sizes: LENGTH: 72- INCHES NOMINAL, INNER DIA: 2.625 INCHES NOMINAL, INSULATION Thickness: 0.750 INCHES NOMINAL, COLOR: BLACK, DESIGN FORM: FULL ROUND, SUPPLEMENTARY FEATURES: EXPANDED UNICELLULAR PLASTIC FOAM.	
72	DGE105365	MIL-P-15280	564000237482		60 / EACH/N						TECHNICAL SPECIFICATION - mil-	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			7 / INSULATION SLEEVING THERMAL		UMBER						p-15280 Sleeve Sizes: LENGTH: 72-INCHES NOMINAL, INNER DIA: 2.625 INCHES NOMINAL, INSULATION Thickness: 0.750 INCHES NOMINAL, COLOR: BLACK, DESIGN FORM: FULL ROUND, SUPPLEMENTARY FEATURES: EXPANDED UNICELLULAR PLASTIC FOAM. <u>GENERAL SPECIFICATION - mil-p-15280</u> Sleeve Sizes: LENGTH: 72-INCHES NOMINAL, INNER DIA: 2.625 INCHES NOMINAL, INSULATION Thickness: 0.750 INCHES NOMINAL, COLOR: BLACK, DESIGN FORM: FULL ROUND, SUPPLEMENTARY FEATURES: EXPANDED UNICELLULAR PLASTIC FOAM.	
73	DGE105 364	MIL-P- 15280	564000237482 8 / INSULATION SLEEVING THERMAL		60 / EACH/N UMBER						<u>TECHNICAL SPECIFICATION - MIL-P-15280</u> SLEEVE SIZES: LENGTH: 72-INCHES NOMINAL, INNER DIA: 3.500 INCHES NOMINAL, INSULATION THICKNESS: 0.750 INCHES NOMINAL, COLOR: BLACK, DESIGN FORM: FULL ROUND, SUPPLEMENTARY FEATURES: EXPANDED UNICELLULAR PLASTIC FOAM. <u>GENERAL SPECIFICATION - MIL-P-15280</u> SLEEVE SIZES: LENGTH: 72-INCHES NOMINAL, INNER DIA: 3.500 INCHES NOMINAL, INSULATION THICKNESS: 0.750 INCHES NOMINAL, COLOR: BLACK, DESIGN FORM: FULL ROUND, SUPPLEMENTARY FEATURES: EXPANDED UNICELLULAR PLASTIC FOAM.	
74	DGE105 212	NO DATA AVAILABL E	593572507749 4 / RAYCHEM J.S.C.R HEAT SHRINK SLEEVE, SIZE 31/8 LG, 01		50 / METER						<u>TECHNICAL SPECIFICATION - A.</u> PRODUCT CATEGORY :DUAL WALL B. PRODUCT NAME: TAT-25 C. OPERATING TEMPERATURE °C: -55 TO 110 D. MIN FULL RECOVERY TEMPERATURE °C:	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			METER								121 E. COLOR: STANDARD BLACK F. SPECIFICATION: TAT-125 SCD; RW-3032; AS23053/4, CL. 2; UL 224 G. FLAMMABILITY RATING: ASTM D26714, PROCEDURE B H. TYPICAL APPLICATION: INSULATE AND PROTECT ELECTRICAL CONNECTIONS, WIRES AND CABLES FROM ENVIRONMENTAL FACTORS LIKE MOISTURE, HEAT AND ABRASION. <u>GENERAL SPECIFICATION</u> - A. PRODUCT CATEGORY :DUAL WALL B. PRODUCT NAME: TAT-25 C. OPERATING TEMPERATURE °C: -55 TO 110 D. MIN FULL RECOVERY TEMPERATURE °C: 121 E. COLOR: STANDARD BLACK F. SPECIFICATION: TAT-125 SCD; RW-3032; AS23053/4, CL. 2; UL 224 G. FLAMMABILITY RATING: ASTM D26714, PROCEDURE B H. TYPICAL APPLICATION: INSULATE AND PROTECT ELECTRICAL CONNECTIONS, WIRES AND CABLES FROM ENVIRONMENTAL FACTORS LIKE MOISTURE, HEAT AND ABRASION.	
75	DGH102045	TSGU-400	614500110634 1 / CABLE ELECT 3- COND/0.742" SI &GLASS INSUL PVC JKT 1000V 400A		250 / METER						<u>TECHNICAL SPECIFICATION</u> - 04 ton Ac Compressor MIL-C- 24643/16 <u>GENERAL</u> <u>SPECIFICATION</u> - 04 ton Ac Compressor MIL-C-24643/16	
76	DGE103243	NO DATA AVAILABL E	033050000001 8 / POPLIN CLOTH TARTAN GREEN WIDTH 36	GENERAL USE FOR BATTERIES OF S/MS	1500 / YARD	NO DATA AVAILAB LE					<u>TECHNICAL SPECIFICATION</u> - material composition of 100% cotton WIDTH = 36" <u>GENERAL</u> <u>SPECIFICATION</u> - material composition of 100% cotton WIDTH = 36"	
77	DGD105282	LG-MP- 9482 SR	731073511893 9 / MICROWAVE	MICROWAVE OVEN LG	3 / EACH/N UMBER						<u>TECHNICAL SPECIFICATION</u> - capacity: 36 LITTERs <u>GENERAL</u> <u>SPECIFICATION</u> - capacity: 36	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			OVEN-LG SHARP WAVES/DAWLANCE & TOSHIBA								LITTERs	
78	DGD105070	LG-MP-9482 SR	7310735118939 / MICROWAVE OVEN-LG SHARP WAVES/DAWLANCE & TOSHIBA	MICROWAVE OVEN LG	1 / EACH/NUMBER						TECHNICAL SPECIFICATION - capacity: 36 LITTERs GENERAL SPECIFICATION - capacity: 36 LITTERs	
79	DGE102863	NO DATA AVAILABLE	0413500000133 / EAR DEFENDER		55 / PAIR	PELTOR H10A/OPTIME 105					TECHNICAL SPECIFICATION - acceptance on delivery or at the time of inspection may be obtained Technical data provided in EN 352-2. Reduces noise levels by ~ 20-30 dB. a. Ear defender medium size (Pic of packing and ear defenders are enclosed) b. Make: PELTOR Model : pletor h10a/OPTIME 105 3M Ear Defender Bilsom Viking Medium Size (HAC Hardwar & Industrial Safety Equip) GENERAL SPECIFICATION - acceptance on delivery or at the time of inspection may be obtained Technical data provided in EN 352-2. Reduces noise levels by ~ 20-30 dB. a. Ear defender medium size (Pic of packing and ear defenders are enclosed) b. Make: PELTOR Model : pletor h10a/OPTIME 105 3M Ear Defender Bilsom Viking Medium Size (HAC Hardwar & Industrial Safety Equip)	
80	DGE102833	NO DATA AVAILABLE	0413780000488 / HOSE RUBBER 135X121X111 MM	BOOSTER ENGINE L12V 180	4 / EACH/NUMBER	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
81	DGD91470		7730705048055 / PLATE PUDDING FLAT 19CM		12 / EACH/NUMBER						TECHNICAL SPECIFICATION - FLAT 19CM GOLDEN CRESTED , MATERIAL PORCELAIN FOOD GRADE CERA-E-NOOR (LOCAL)	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			GOLDEN CRESTED								GENERAL SPECIFICATION - FLAT 19CM GOLDEN CRESTED , MATERIAL PORCELAIN FOOD GRADE CERA-E-NOOR (LOCAL)	
82	DGE102130	NO DATA AVAILAB E	7920005436492 / PAPER TOWEL		7 / BOX						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
83	DGE102864	NO DATA AVAILAB E	0432500000006 / DUST RESPIRATOR		18 / EACH/N UMBER	M 511-N95					TECHNICAL SPECIFICATION - packing: standard Product Name: KN95 Respirator Face Mask Aerosol Type: Non Oil Color: White Size: Universal Exhalation valve: No Strap Attachment: Stapled Adjustable Noise: clip Yes Standard: KN95 China (GB 2626-2006) Filtering Rate: = 95% GENERAL SPECIFICATION - packing: standard Product Name: KN95 Respirator Face Mask Aerosol Type: Non Oil Color: White Size: Universal Exhalation valve: No Strap Attachment: Stapled Adjustable Noise: clip Yes Standard: KN95 China (GB 2626-2006) Filtering Rate: = 95%	
84	DGE105363	NO DATA AVAILAB E	04325000000024 / HELMET PROTECTIVE WITH VISER COLOUR WHITE (HALF HEAD)		30 / EACH/N UMBER	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - Make: UK Brand / Company Name: JSP Safety GENERAL SPECIFICATION - Make: UK Brand / Company Name: JSP Safety	
85	DGE100597	NIL	8105011242645 / BAG ANTISTATIC WITH BUBBLE SHEET 406X508MM RS P/N 217-9451	STATIC SAFETY OF EQUIPMENT/C OMPONENTS	20 / EACH/N UMBER						TECHNICAL SPECIFICATION - ADD: Item name 1(ACODP3)2 NAVAIR AND NAVSEAMANGED ORIGINAL DESIGNED ACTIVITY DWG. NOT MATERIAL/PARTS SUPPLIER 13333 ISAAC HULL AVE AS WASHINGTON DC UNITED STATES. 20376 215+897-1557 GENERAL SPECIFICATION - ADD: Item name 1(ACODP3)2 NAVAIR AND NAVSEAMANGED ORIGINAL DESIGNED ACTIVITY DWG. NOT MATERIAL/PARTS	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
86	DGE102 175	NIL	810501124264 5 / BAG ANTISTATIC WITH BUBBLE SHEET 406X508MM RS P/N 217- 9451	STATIC SAFETY OF EQUIPMENT/C OMPONENTS	20 / EACH/N UMBER						SUPPLIER 13333 ISAAC HULL AVE AS WASHINGTON DC UNITED STATES. 20376 215+897-1557 <u>TECHNICAL SPECIFICATION -</u> ADD: Item name 1(ACODP3)2 NAVAIR AND NAVSEAMANGED ORIGINAL DESIGNED ACTIVITY DWG. NOT MATERIAL/PARTS SUPPLIER 13333 ISAAC HULL AVE AS WASHINGTON DC UNITED STATES. 20376 215+897- 1557 <u>GENERAL SPECIFICATION -</u> ADD: Item name 1(ACODP3)2 NAVAIR AND NAVSEAMANGED ORIGINAL DESIGNED ACTIVITY DWG. NOT MATERIAL/PARTS SUPPLIER 13333 ISAAC HULL AVE AS WASHINGTON DC UNITED STATES. 20376 215+897-1557	
87	DGE100 790		813570506488 2 / TAPE TRANSPAREN T ADHESIVE WATER PROOFED WD.12 MM LG. 66 MTR.	GENERAL USE.	6 / ROLL						<u>TECHNICAL SPECIFICATION - NO</u> DATA AVAILABLE <u>GENERAL</u> <u>SPECIFICATION - NO DATA</u> AVAILABLE	
88	DGT105 346	NO DATA AVAILABL E	010050000001 8 / Ply Wood GD-I, 7 ply (core and inner plies of Poplar. SIZE: L=8', W=4', TH=12MM	SPECEFCATI ON.IM-2581 (E)	1088 / SQ FEET	NO DATA AVAILAB LE					<u>TECHNICAL SPECIFICATION -</u> SIZE: LENGTH: 8-FEET, WIDTH: 4 FEET, THICKNESS: 12 MM 1. BS- 6566 OF 1985. PART 1-8. TYPE- INT, 2. WOOD PRESERVATION AS PER BS-6566,Part-7,appendex A. 3. MOISTURE CONTENT= BS EN 322 : 1993, 4. BONDING QUALITY= BS 314-1 : 2004 AND BS EN 314-2 : 1993, 5. GLUE= BS 1203 : 2001, 6. PRESERVATION= BS 4072 : 1999, 7. PHYSICAL EVALUATION= BS 6566-6 : 1985, 8. DENSITY= BS EN 323 : 1993 9. DENSITY REQUIREMENT= 550-750 PER CUBIC METER, <u>GENERAL</u> <u>SPECIFICATION - SIZE: LENGTH:</u> 8-FEET, WIDTH: 4 FEET,	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											THICKNESS: 12 MM 1. BS-6566 OF 1985. PART 1-8. TYPE-INT, 2. WOOD PRESERVATION AS PER BS-6566,Part-7,appendex A. 3. MOISTURE CONTENT= BS EN 322 : 1993, 4. BONDING QUALITY= BS 314-1 : 2004 AND BS EN 314-2 : 1993, 5. GLUE= BS 1203 : 2001, 6. PRESERVATION= BS 4072 : 1999, 7. PHYSICAL EVALUATION= BS 6566-6 : 1985, 8. DENSITY= BS EN 323 : 1993 9. DENSITY REQUIREMENT= 550-750 PER CUBIC METER.	
89	DGT102 875	NO DATA AVAILABL E	010050000008 8 / Ply wood GD-I, 9 ply,	X 19.05 MM)	1440 / SQ FEET	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - SPECIFICATION OF ITEM: 1. Both face and back veneers of Gurjan Wood. 2. Core, and inner plies of poplar 3. size: LengTh= 8-FEET, Width=4-FEET & Thickness= 19MM (±2MM) 4. ACCEPTANCE CRITERIA: Plywood, GD-I, 9-Ply, Both face and back veneers of Gurjan-wood and core and inner plies of poplar. Thickness of Face Back veneer 0.6mm. 5. TESTING CRITERIA: MOISTURE content Bonding Quality Glue Preservation Physical Evaluation Density. 6. SPECIFICATIONS/STANDARDS BS EN 322: 1993, BS 314-1: 2004 AND BS EN 314-2: 1993, BS 1203: 2001, BS 4072: 1999, BS 6566-6: 1985, BS EN 323: 1993, MOISTURE: 6-14% DENSITY RANGE I.E 700 TO 850 KG PER CUBIC METER. GENERAL SPECIFICATION - SPECIFICATION OF ITEM: 1. Both face and back veneers of Gurjan Wood. 2. Core, and inner plies of poplar 3. size: LengTh= 8-FEET, Width=4-FEET & Thickness= 19MM(±2MM) 4. ACCEPTANCE CRITERIA: Plywood, GD-I, 9-Ply, Both face and back veneers of Gurjan-wood and core	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											and inner plies of poplar. Thickness of Face Back veneer 0.6mm. 5. TESTING CRITERIA: MOISTURE content Bonding Quality Glue Preservation Physical Evaluation Density. 6. SPECIFICATIONS/STANDARDS BS EN 322: 1993, BS 314-1: 2004 AND BS EN 314-2: 1993, BS 1203: 2001, BS 4072: 1999, BS 6566-6: 1985, BS EN 323: 1993, MOISTURE: 6-14% DENSITY RANGE I.E 700 TO 850 KG PER CUBIC METER.	
90	DGE105211	NO DATA AVAILABLE	0091591292455 / MATTING FLOOR COIR WIDTH 36".		120 / METER	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - a. Per role length: 50 mtr b. Width: 36" (03 feet) c. Weight per square meter: 1.650 Kgs (1650 grams) GENERAL SPECIFICATION - a. Per role length: 50 mtr b. Width: 36" (03 feet) c. Weight per square meter: 1.650 Kgs (1650 grams)	
91	DGT103505	NO DATA AVAILABLE	01005000000015 / PLY WOOD GRADE-1, 5 PLY		672 / SQ FEET	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - SIZE LENGTH=8 FEET, WIDTH=4 FEET, THICKNESS=06 MM(±1MM) SPECIFICATION; 1. MOISTURE CONTENT: BS EN 322 : 1993 2. BONDING QUALITY: BS 314-1 : 2004 AND BS EN 314-2 : 1993 3. GLUE: BS 1203 : 2001 4. PRESERVATION: BS 4072 : 1999 5. PHYSICAL EVALUTION: BS 6566-6 : 1985 6. DENSITY: BS EN 323 : 1993 (550-750 KILOGRAM PER CUBIC) GENERAL SPECIFICATION - SIZE LENGTH=8 FEET, WIDTH=4 FEET, THICKNESS=06 MM(±1MM) SPECIFICATION; 1. MOISTURE CONTENT: BS EN 322 : 1993 2. BONDING QUALITY: BS 314-1 : 2004 AND BS EN 314-2 : 1993 3. GLUE: BS 1203 : 2001 4. PRESERVATION: BS 4072 : 1999 5. PHYSICAL EVALUTION: BS 6566-6 : 1985 6. DENSITY: BS EN 323 : 1993 (550-750 KILOGRAM PER	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											CUBIC)	
92	DGT98652	NO DATA AVAILABLE	010050000002 9 / Ply wood, Marine All Shesham, 13-Ply, GD-II, (WBP, Treated with Preservative) Size: L=8FT, W=4FT, TH=25MM, (Core inner plies & veneer) (Wood Should be all Shesham)		64 / SQ FEET	NO DATA AVAILABLE					<u>TECHNICAL SPECIFICATION - 1.</u> density of plywood marine: may be 560 kgs per cubic meter 2. bs 1088 part i & ii. 3. DENSITY OF TIMBER SHEESHAM= 560 KGS PER CUBIC METER <u>GENERAL SPECIFICATION</u> - 1. density of plywood marine: may be 560 kgs per cubic meter 2. bs 1088 part i & ii. 3. DENSITY OF TIMBER SHEESHAM= 560 KGS PER CUBIC METER	
93	DGT101283	NO DATA AVAILABLE	010050000002 9 / Ply wood, Marine All Shesham, 13-Ply, GD-II, (WBP, Treated with Preservative) Size: L=8FT, W=4FT, TH=25MM, (Core inner plies & veneer) (Wood Should be all Shesham)		50 / SQ FEET	NO DATA AVAILABLE					<u>TECHNICAL SPECIFICATION - 1.</u> density of plywood marine: may be 560 kgs per cubic meter 2. bs 1088 part i & ii. 3. DENSITY OF TIMBER SHEESHAM= 560 KGS PER CUBIC METER <u>GENERAL SPECIFICATION</u> - 1. density of plywood marine: may be 560 kgs per cubic meter 2. bs 1088 part i & ii. 3. DENSITY OF TIMBER SHEESHAM= 560 KGS PER CUBIC METER	
94	DGE101408	NO DATA AVAILABLE	8415PK506744 2 / CLOTH PARASHUTE GRAY		500 / METER						<u>TECHNICAL SPECIFICATION -</u> Width must be 5-6 feet Water proof Rot proof colour of item is gray end user acceptance required on delivery <u>GENERAL SPECIFICATION -</u> Width must be 5-6 feet Water proof Rot proof colour of item is gray end user acceptance required on delivery	
95	DGE105351	NO DATA AVAILABLE	047650000006 1 / GLOVES LEATHER FOR WELDING,		50 / PAIR	NO DATA AVAILABLE					<u>TECHNICAL SPECIFICATION - 1.</u> DESCRIPTION GOAT SKIN CUT AND HEAT RESISTANT WELDING GLOVES 2. MATERIAL GOAT SKIN	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			treated with preservative, standard quality								LEATHER LINED WITH KEVLAR AND GLASS FILAMENT 3. MODEL XPRO GOAT SKIN CUT AND HEAT RESISTANT WELDING GLOVES 4. SPECIFICATION PREMIUM GOAT GRAIN LEATHER WELDING GLOVE WITH BLACK COW SPLIT LEATHER GAUNTLET AND INSIDE LINED WITH 100% KEVLAR/ GLASS FILAMENT (ANSI CUT LEVEL A5) AND SET-IN KEYSTONE THUMB FOR GREATER COMFORT. ELASTICIZED BACKS FOR A SNUG FIT. 5. APPLICATION METAL, CONSTRUCTION ETC 6. AVAILABLE SIZES XS TO 3 XL detials: 1. PRODUCT CLASSIFICATION: Welding gloves 2. COMPOSITION: COW LEATHER, FLEECE LINING 3. COLOUR: Yellow 4. SIZE : 16 " 5. PACKAGING ; 1 dozen pair per polybag broucher uploaded as annex <u>GENERAL SPECIFICATION - 1. DESCRIPTION</u> GOAT SKIN CUT AND HEAT RESISTANT WELDING GLOVES 2. MATERIAL GOAT SKIN LEATHER LINED WITH KEVLAR AND GLASS FILAMENT 3. MODEL XPRO GOAT SKIN CUT AND HEAT RESISTANT WELDING GLOVES 4. SPECIFICATION PREMIUM GOAT GRAIN LEATHER WELDING GLOVE WITH BLACK COW SPLIT LEATHER GAUNTLET AND INSIDE LINED WITH 100% KEVLAR/ GLASS FILAMENT (ANSI CUT LEVEL A5) AND SET-IN KEYSTONE THUMB FOR GREATER COMFORT. ELASTICIZED BACKS FOR A SNUG FIT. 5. APPLICATION METAL, CONSTRUCTION ETC 6. AVAILABLE SIZES XS TO 3 XL detials: 1. PRODUCT CLASSIFICATION: Welding gloves 2.	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											COMPOSITION: COW LEATHER, FLEECE LINING 3. COLOUR: Yellow 4. SIZE : 16 " 5. PACKAGING ; 1 dozen pair per polybag broucher uploaded as annex	
96	DGB94070	NO DATA AVAILABLE	0265500001302 / HINGES-PYANO-STEEL- LG 6 FT 0.750-INCH WIDTH		109 / EACH/NUMBER	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
97	DGE103544	NO DATA AVAILABLE	0451500000016 / TAPE-WHITE-COTTON		150 / YARD	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
98	DGE102991	NO DATA AVAILABLE	0451500000016 / TAPE-WHITE-COTTON		600 / YARD	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
99	DGE100563	BA111131/5931052	8465725022150 / BAG CARRYING FOR DIVING EQUIPMENT		2 / EACH/NUMBER						TECHNICAL SPECIFICATION - (1) Volume : 130 Liters (2) Dimension : 85 cm x35 cm x 45 cm (3) Made from : Bag made with Tarpolin (4) Shape : U shape for opening (5) Appearance : 2 handles and shoulder strips/ 2 screwed valves GENERAL SPECIFICATION - (1) Volume : 130 Liters (2) Dimension : 85 cm x35 cm x 45 cm (3) Made from : Bag made with Tarpolin (4) Shape : U shape for opening (5) Appearance : 2 handles and shoulder strips/ 2 screwed valves	
100	DGT97544	NO DATA AVAILABLE	0100500000039 / TIMBER FIR HIMALAYA/ SPRUCE SLEEPER, WELL SEASONED LOCAL/ IMPORTED, SIZE: L=8'-15', W=8"-14", h=4"-10"	(3.05MTR X254 MM X127 MM) SPECE/PSG 69	25 / CUBIC FOOT	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - SPECS= PSG/69 well-seasoned wood, moisture content = 12% ± 02%, GENERAL SPECIFICATION - SPECS= PSG/69 well-seasoned wood, moisture content = 12% ± 02%,	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
101	DGE105421		7110705049226 / STEEL CABINET SIZE AS PER DRAWING 7.6" X24"X18"	FOR MEDICAL-RECORD-OFFICERS-SAILORS	2 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
102	DGE100924	NO DATA AVAILABLE	0559790001985 / TAPE INSULATING BIAS WIDTH 0.500IN TH 0.01IN LENGTH 50.0 MTR	GENERAL ELECTRIC USE	35 / ROLL	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
103	DGB101201		4510705123201 / BATH MIXER WALL TYPE WITH UNIVERSAL SHOWER (MUSLIM BIB COCK		2 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
104	DGT102876	NO DATA AVAILABLE	01005000000043 / Timber Gurjan Grade-I (Red pine) SLEEPER seasoned (swan)		12 / CUBIC FOOT	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - SIZE: LENGTH= 12 FEET TO 23 FEET, WIDTH= 08 INCH TO 12 INCH, THICKNESS= 05 INCH TO 10 INCH MOISTURE CONTENT: 30% (±10%) GENERAL SPECIFICATION - SIZE: LENGTH= 12 FEET TO 23 FEET, WIDTH= 08 INCH TO 12 INCH, THICKNESS= 05 INCH TO 10 INCH MOISTURE CONTENT: 30% (±10%)	
105	DGE101999	5012568166895	4020993960753 / ROPE FIBROUS, POLYESTER/ PROPYLENE MIX, 08-STRAND, DIA: 40MM		660 / METER						TECHNICAL SPECIFICATION - SPECIFICATION: 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO-10556. 2. 40-MM DIA BLACK BERTHING POLYESTER/ PROPYLENE MIX, 8-STRAND MOORING NUMBER-5, MBL 26.4 TONNES, MB-67 TABLE-3, 3.8, PLAIN ENDS UV STABILISED ISO 9554 of 2019. 3. STANDARD ACCORDANCE TO ISO 2307 PACKAGING. 4. STANDARD OF	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											MANUFACTURE ISO 2307 OF 2019 5. CONFIRMATION OF STANDARD EN-ISO 2307 OF 2019. 6. 220 METER PER COILS. 7. CERTIFICATIONS: VALID LLOYD TEST CERTIFICATE REQUIRED INDICATION BATCH/LOT NUMBER OF IDENTIFICATION AND WORKING / BREAKING AND STRENGTH OF STORES. 8. SUPPLY FIRM SHALL OBTAIN AND FURNISH MANUFACTURE CERTIFICATE TO PN AS SAME QUALITY/ STANDARD AS BEING PROVIDED TO MoD (UK)/ RN/ RELATED COUNTRY. 9. ROPE ARE TO BE SUPPLIED WITH VALID LLOYD'S/ BSI/ IACS MEMBER SOCIETY CERTIFICATION. 10. OEM ADDRESS: MARLOW ROPES LTD HAILSHAM EAST SUSSEX UNITED KINGDOM Phone: +44(0) 1323444444 EMAIL: sales@marlowropes.com GENERAL SPECIFICATION - SPECIFICATION: 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO-10556. 2. 40-MM DIA BLACK BERTHING POLYESTER/ PROPYLENE MIX, 8-STRAND MOORING NUMBER-5, MBL 26.4 TONNES, MB-67 TABLE-3, 3.8, PLAIN ENDS UV STABILISED ISO 9554 of 2019. 3. STANDARD ACCORDANCE TO ISO 2307 PACKAGING. 4. STANDARD OF MANUFACTURE ISO 2307 OF 2019 5. CONFIRMATION OF STANDARD EN-ISO 2307 OF 2019. 6. 220 METER PER COILS. 7. CERTIFICATIONS: VALID LLOYD TEST CERTIFICATE REQUIRED INDICATION BATCH/LOT NUMBER OF IDENTIFICATION AND WORKING / BREAKING AND STRENGTH OF STORES. 8.	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											SUPPLY FIRM SHALL OBTAIN AND FURNISH MANUFACTURE CERTIFICATE TO PN AS SAME QUALITY/ STANDARD AS BEING PROVIDED TO MoD (UK)/ RN/ RELATED COUNTRY. 9. ROPE ARE TO BE SUPPLIED WITH VALID LLOYD'S/ BSI/ IACS MEMBER SOCIETY CERTIFICATION. 10. OEM ADDRESS: MARLOW ROPES LTD HAILSHAM EAST SUSSEX UNITED KINGDOM Phone: +44(0) 1323444444 EMAIL: sales@marlowropes.com	
106	DGE101 270	501256816 6895	402099396075 3 / ROPE FIBROUS, POLYESTER/ PROPYLENE MIX, 08- STRAND, DIA: 40MM		440 / METER						TECHNICAL SPECIFICATION - SPECIFICATION: 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO-10556. 2. 40-MM DIA BLACK BERTHING POLYESTER/ PROPYLENE MIX, 8-STRAND MOORING NUMBER-5, MBL 26.4 TONNES, MB-67 TABLE-3, 3.8, PLAIN ENDS UV STABILISED ISO 9554 of 2019. 3. STANDARD ACCORDANCE TO ISO 2307 PACKAGING. 4. STANDARD OF MANUFACTURE ISO 2307 OF 2019 5. CONFIRMATION OF STANDARD EN-ISO 2307 OF 2019. 6. 220 METER PER COILS. 7. CERTIFICATIONS: VALID LLOYD TEST CERTIFICATE REQUIRED INDICATION BATCH/LOT NUMBER OF IDENTIFICATION AND WORKING / BREAKING AND STRENGTH OF STORES. 8. SUPPLY FIRM SHALL OBTAIN AND FURNISH MANUFACTURE CERTIFICATE TO PN AS SAME QUALITY/ STANDARD AS BEING PROVIDED TO MoD (UK)/ RN/ RELATED COUNTRY. 9. ROPE ARE TO BE SUPPLIED WITH VALID LLOYD'S/ BSI/ IACS MEMBER SOCIETY CERTIFICATION. 10.	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											OEM ADDRESS: MARLOW ROPES LTD HAILSHAM EAST SUSSEX UNITED KINGDOM Phone: +44(0) 1323444444 EMAIL: sales@marlowropes.com <u>GENERAL SPECIFICATION</u> - SPECIFICATION: 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO-10556. 2. 40-MM DIA BLACK BERTHING POLYESTER/ PROPYLENE MIX, 8-STRAND MOORING NUMBER-5, MBL 26.4 TONNES, MB-67 TABLE-3, 3.8, PLAIN ENDS UV STABILISED ISO 9554 of 2019. 3. STANDARD ACCORDANCE TO ISO 2307 PACKAGING. 4. STANDARD OF MANUFACTURE ISO 2307 OF 2019 5. CONFIRMATION OF STANDARD EN-ISO 2307 OF 2019. 6. 220 METER PER COILS. 7. CERTIFICATIONS: VALID LLOYD TEST CERTIFICATE REQUIRED INDICATION BATCH/LOT NUMBER OF IDENTIFICATION AND WORKING / BREAKING AND STRENGTH OF STORES. 8. SUPPLY FIRM SHALL OBTAIN AND FURNISH MANUFACTURE CERTIFICATE TO PN AS SAME QUALITY/ STANDARD AS BEING PROVIDED TO MoD (UK)/ RN/ RELATED COUNTRY. 9. ROPE ARE TO BE SUPPLIED WITH VALID LLOYD'S/ BSI/ IACS MEMBER SOCIETY CERTIFICATION. 10. OEM ADDRESS: MARLOW ROPES LTD HAILSHAM EAST SUSSEX UNITED KINGDOM Phone: +44(0) 1323444444 EMAIL: sales@marlowropes.com	
107	DGE101634	NO DATA AVAILABLE	0461546004602 / BOX FIRST AID 728 MS		3 / EACH/NUMBER						<u>TECHNICAL SPECIFICATION</u> - NO DATA AVAILABLE <u>GENERAL SPECIFICATION</u> - NO DATA AVAILABLE	
108	DGE105	565665	534070524611		2000 /	565665					<u>TECHNICAL SPECIFICATION</u> -	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
	435		1 / leatherite for wallpaper		SQ FEET						leatherite wallpaper sheets GENERAL SPECIFICATION - leatherite wallpaper sheets	
109	DGE64931	CTLCB10008025	5340735267410 / CANTILEVER BRACKET 3' (1000 X 80 X 2.5MM)		72 / EACH/NUMBER	CANTILEVER BARACKET 3' CTLCB10008025					TECHNICAL SPECIFICATION - PROFILE: CHANNEL SECTION: 1000 X 80 X 2.5MM MATERIAL: HR GRADE: Q-235 SURFACE FINISH: POWDER COATED 60 MICRONS GENERAL SPECIFICATION - PROFILE: CHANNEL SECTION: 1000 X 80 X 2.5MM MATERIAL: HR GRADE: Q-235 SURFACE FINISH: POWDER COATED 60 MICRONS	
110	DGE105426	honey/mk/22	5970705267288 / Honey Comb Hole matt rubber 20"x36"x1/2"		80 / EACH/NUMBER	NA					TECHNICAL SPECIFICATION - null GENERAL SPECIFICATION - null	
111	DGB100960	GM-009 G	4820705292327 / G.M/ Bronze Globe Valves flange type".		8 / EACH/NUMBER	GM-009 G					TECHNICAL SPECIFICATION - null GENERAL SPECIFICATION - null	

INVITATION TO TENDER VSD I.T DATE 07-07-2026

The following item is required against local purchase. Suppliers are requested to quote by **21-07-2026** before 11:00 AM quotation are to be deposited in the quotation box.


<u>S.No</u>	<u>LPR NO & DATE</u>	<u>QTY</u>	<u>DELIVERY</u>
1.	VSD-LPR NO.121/2026 DATE 29 JUNE 2026 SQUASHES	Lemon 372 Ltrs Orange 372 Ltrs Mango 372 Ltrs	VSD AT KARACHI

NOTE:-

1. Non-registered firms/supplier are required to forward bank draft/pay order equal to 5% total value of quotation in favor of "**Commander Local Purchase**" division along with their bids.
2. For any amplified details interested firms may contact local purchase division in person.

NOTE:

SPECIFICATION OF ITEM IS ATTACHED


Group officer
Local Purchase

INVITATION TO TENDER VSD I.T DATE 07-07-2026

The following item is required against local purchase. Suppliers are requested to quote by **21-07-2026** before 11:00 AM quotation are to be deposited in the quotation box.


<u>S.No</u>	<u>LPR NO & DATE</u>	<u>QTY</u>	<u>DELIVERY</u>
1.	VSD-LPR NO.120/2026 DATE 29 JUNE 2026 SQUASHES	Lemon 372 Ltrs Orange 372 Ltrs Mango 372 Ltrs	VSD AT KARACHI

NOTE:-

1. Non-registered firms/supplier are required to forward bank draft/pay order equal to 5% total value of quotation in favor of "**Commander Local Purchase**" division along with their bids.
2. For any amplified details interested firms may contact local purchase division in person.

NOTE:

SPECIFICATION OF ITEM IS ATTACHED


Group officer
Local Purchase

INVITATION TO TENDER VSD I.T DATE 07-07-2026

The following item is required against local purchase. Suppliers are requested to quote by **21-07-2026** before 11:00 AM quotation are to be deposited in the quotation box.


<u>S.No</u>	<u>LPR NO & DATE</u>	<u>QTY</u>	<u>DELIVERY</u>
1.	VSD-LPR NO.119/2026 DATE 29 JUNE 2026 SQUASHES	Lemon 372 Ltrs Orange 372 Ltrs Mango 372 Ltrs	VSD AT KARACHI

NOTE:-

1. Non-registered firms/supplier are required to forward bank draft/pay order equal to 5% total value of quotation in favor of "**Commander Local Purchase**" division along with their bids.
2. For any amplified details interested firms may contact local purchase division in person.

NOTE:

SPECIFICATION OF ITEM IS ATTACHED


Group officer
Local Purchase

INVITATION TO TENDER VSD I.T DATE 07-07-2026

The following item is required against local purchase. Suppliers are requested to quote by **21-07-2026** before 11:00 AM quotation are to be deposited in the quotation box.


<u>S.No</u>	<u>LPR NO & DATE</u>	<u>QTY</u>	<u>DELIVERY</u>
1.	VSD-LPR NO.122/2026 DATE 29 JUNE 2026 SQUASHES	Lemon 372 Ltrs Orange 372 Ltrs Mango 372 Ltrs	VSD AT KARACHI

NOTE:-

1. Non-registered firms/supplier are required to forwarded bank draft/pay order equal to 5% total value of quotation in favor of "**Commander Local Purchase**" division along with their bids.
2. For any amplified details interested firms may contact local purchase division in person.

NOTE:

SPECIFICATION OF ITEM IS ATTACHED


Group officer
Local Purchase

SPECIFICATIONS OF SQUASH (LEMON)

a. Squash shall be made with the expressed juice of the sound ripe fruit with the pulp containing sugar, dextrose, invert sugar or liquid glucose, high fructose glucose either singly or in combination, with or without portable water, peel oil, fruit essences, natural flavors only, common salt, citric acid, ascorbic acid, permitted preservatives and permitted food colors.

b. The product shall be in pure form and free from adulterants, un-due sediments, contaminants, heavy metals, non-permitted chemicals additives and other objectionable matter.

c. The product shall have a normal sweet characteristic taste free from objectionable sensory characters, shall be fit for human consumption by all means and also suitable for its intended use.

1. **Testing and Analysis.** The product should conform to following:

S No	Parameter	Requirement
a.	Total soluble solids	40% min
b.	Acidity	4% max
c.	TPC	3×10^3 cfu/ml max
d.	E. Coli	Nil
e.	Salmonella	Nil

2. **Packing.** The product shall be packed in well-closed and sealed PET/ glass bottles, made from sound, suitable and food graded material. Each bottle may carry net volume up to 1000 ml or as required through supply order. These bottles shall further be packed in 5 ply strong, corrugated and properly sealed trade cartons. Each carton should contain up to 12 ltr net volume of product.

3. **Marking.** The product shall fulfil the labelling requirements of Codex General Standard for labelling of Packaged Food (Codex Stan 1:1985) and Pakistan standard for labelling (PS 1485:1994).

- a. The following particulars shall be printed on each bottle:

- (1) Product name (Brand name – if any) coloured glazed image.
- (2) Handling, storage and usage instructions/ guidelines.
- (3) Date of manufacturing.
- (4) Expiry date/ best before.
- (5) Net weight/volume.
- (6) Name and address of the manufacturer.

- b. The following particulars shall be printed on each carton:

- (1) Product name (Brand name – if any).
- (2) Date of manufacturing.

- (3) Expiry date/ best before.
- (4) Name and address of the manufacturer/ supplier.
- (5) Specially packed for Pakistan Navy.
- (6) Batch No/ Lot No (if any)

4. Hygiene. The product shall be prepared, packed and stored in good hygienic premises in accordance with Pakistan Standards – GMP (PS 1825:1987, as revised) and Codex Alimentarius Commission's international code of practices and general principles of food hygiene (CAC/RCP1-1969, rev.4-2003).

5. Inspection. Site shall be open to inspection at any time, by a competent authority approved by Pakistan Navy. The inspection of firm and product will be carried out under guidelines obtained from following:

- a. Pakistan Standard for fruit squashes (PS 506:2010, as revised).
- b. Pure Food Regulations 2018 (PFR 2018).


FALAK UR REHMAN
Lt Pakistan Navy
Group Officer (Dry)

SPECIFICATIONS OF SQUASH (ORANGE)

a. Squash shall be made with the expressed juice of the sound ripe fruit with the pulp containing sugar, dextrose, invert sugar or liquid glucose, high fructose glucose either singly or in combination, with or without portable water, peel oil, fruit essences, natural flavors only, common salt, citric acid, ascorbic acid, permitted preservatives and permitted food colors.

b. The product shall be in pure form and free from adulterants, un-due sediments, contaminants, heavy metals, non-permitted chemicals additives and other objectionable matter.

c. The product shall have a normal sweet characteristic taste free from objectionable sensory characters, shall be fit for human consumption by all means and also suitable for its intended use.

1. **Testing and Analysis.** The product should conform to following:

S No	Parameter	Requirement
a.	Total soluble solids	40% min
b.	Acidity	4% max
c.	TPC	3×10^3 cfu/ml max
d.	E. Coli	Nil
e.	Salmonella	Nil

2. **Packing.** The product shall be packed in well-closed and sealed PET/ glass bottles, made from sound, suitable and food graded material. Each bottle may carry net volume up to 1000 ml or as required through supply order. These bottles shall further be packed in 5 ply strong, corrugated and properly sealed trade cartons. Each carton should contain up to 12 ltr net volume of product.

3. **Marking.** The product shall fulfil the labelling requirements of Codex General Standard for labelling of Packaged Food (Codex Stan 1:1985) and Pakistan standard for labelling (PS 1485:1994).

- a. The following particulars shall be printed on each bottle:

- (1) Product name (Brand name – if any) coloured glazed image.
- (2) Handling, storage and usage instructions/ guidelines.
- (3) Date of manufacturing.
- (4) Expiry date/ best before.
- (5) Net weight/volume.
- (6) Name and address of the manufacturer.

- b. The following particulars shall be printed on each carton:

- (1) Product name (Brand name – if any).
- (2) Date of manufacturing.

- (3) Expiry date/ best before.
- (4) Name and address of the manufacturer/ supplier.
- (5) Specially packed for Pakistan Navy.
- (6) Batch No/ Lot No (if any)

4. Hygiene. The product shall be prepared, packed and stored in good hygienic premises in accordance with Pakistan Standards – GMP (PS 1825:1987, as revised) and Codex Alimentarius Commission's international code of practices and general principles of food hygiene (CAC/RCP1-1969, rev.4-2003).

5. Inspection. Site shall be open to inspection at any time, by a competent authority approved by Pakistan Navy. The inspection of firm and product will be carried out under guidelines obtained from following:

- a. Pakistan Standard for fruit squashes (PS 506:2010, as revised).
- b. Pure Food Regulations 2018 (PFR 2018).



FALAK UR REHMAN
Lt Pakistan Navy
Group Officer (Dry)

SPECIFICATIONS OF SQUASH (MANGO)

a. Squash shall be made with the expressed juice of the sound ripe fruit with the pulp containing sugar, dextrose, invert sugar/ liquid glucose, high fructose glucose either singly or in combination, with or without portable water, peel oil, fruit essences, natural flavors only, common salt, citric acid, ascorbic acid, permitted preservatives and permitted food colours.

b. The product shall be in pure form and free from adulterants, un-due sediments, contaminants, heavy metals, non-permitted chemicals additives and other objectionable matter.

c. The product shall have a normal sweet characteristic taste free from objectionable sensory characters, shall be fit for human consumption by all means and also suitable for its intended use.

1. **Testing and Analysis.** The product should conform to following:

S No	Parameter	Requirement
a.	Total soluble solids	50% min
b.	Acidity	2.5% max
c.	TPC	3 x 10 ³ cfu/ml max
d.	E. Coli	Nil
e.	Salmonella	Nil

2. **Packing.** The product shall be packed in well-closed and sealed PET/ glass bottles, made from sound, suitable and food graded material. Each bottle may carry net volume up to 1000 ml or as required through supply order. These bottles shall further be packed in 5 ply strong, corrugated and properly sealed trade cartons. Each carton should contain up to 12 ltr net volume of product.

3. **Marking.** The product shall fulfil the labelling requirements of Codex General Standard for labelling of Packaged Food (Codex Stan 1:1985) and Pakistan standard for labelling (PS 1485:1994).

- a. The following particulars shall be printed on each bottle:

- (1) Product name (Brand name – if any) coloured glazed image.
- (2) Handling, storage and usage instructions/ guidelines.
- (3) Date of manufacturing.
- (4) Expiry date/ best before.
- (5) Net weight/volume.
- (6) Name and address of the manufacturer.

- b. The following particulars shall be printed on each carton:

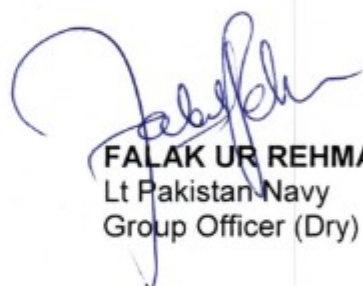
- (1) Product name (Brand name – if any).
- (2) Date of manufacturing.

- (3) Expiry date/ best before.
- (4) Name and address of the manufacturer/ supplier.
- (5) Specially packed for Pakistan Navy.
- (6) Batch No/Lot No (if any)

4. Hygiene. The product shall be prepared, packed and stored in good hygienic premises in accordance with Pakistan Standards – GMP (PS 1825:1987, as revised) and Codex Alimentarius Commission's international code of practices and general principles of food hygiene (CAC/RCP1-1969, rev.4-2003).

5. Inspection. Site shall be open to inspection at any time, by a competent authority approved by Pakistan Navy. The inspection of firm and product will be carried out under guidelines obtained from following:

- a. Pakistan Standard for fruit squashes (PS 506:2010, as revised).
- b. Pure Food Regulations 2018 (PFR 2018).


FALAK UR REHMAN
Lt Pakistan Navy
Group Officer (Dry)